
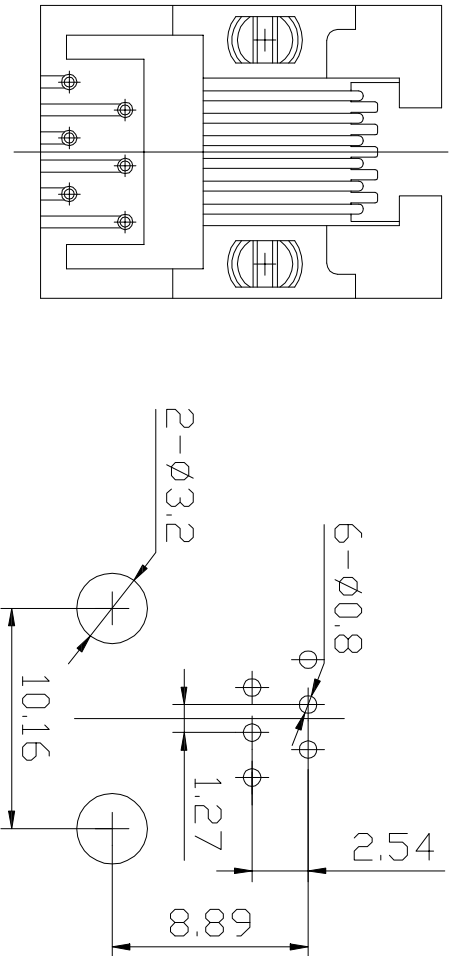


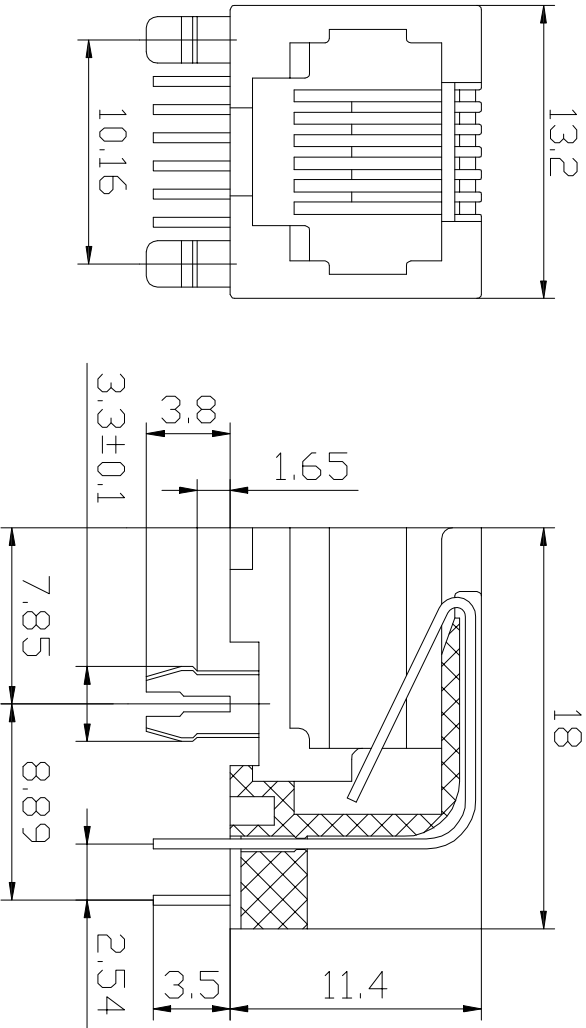

NOTES:
MATERIAL: :GLASS FILLED POLYESTER UL94V-0,
:PHOSPHOR BRONZE Ø=0.45mm,
:GOLD PLATING F4~50u"OVER NICKEL

1.HOUSING MATERIAL
2.CONTACT MATERIAL
3.PLATING
ELECTRICAL: :125 VAC RMS,
:1.5 AMP,
:30 MILLIOHMS MAX,
:500 MEGOHMS MIN @ 500V DC ,

1.VOLTAGE RATING
2.CURRENT RATING
3.CONTACT RESISTANCE
4.INSULATION RESISTANCE
5.DIELECTRIC WITHSTANDING RESISTANCE

:1000V AC RMS 50HZ, 1MIN.

MECHANICAL:
1.DURABILITY: :750 CYCLES MIN.

2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

1.STORAGE : -40°C TO 85°C.

2.OPERATION : 0°C TO 70°C.

PC Board Layout

Component Side Shown

Component Side Shown				APPROVALS		DATE		GEPU 歌普	
DRAWN		ZHWEI CHEN		2015.07.07					
CHECKED						TITLE: RJ CONNECTOR			
APPROVALS						PART NO. RJ11-9W11-DDN-BB-66-B1			
TOLERANCES ARE		30° 以上 10.30 5.10 -5		±0.30 ±0.20 ±0.15 ±0.10		ANGLE ±2°			
								UNIT: mm	
								SCALE: 1:1	
								PROJ. 	
									
								SHEET 1 OF 1	
NEW									
A									
ECN NO.									
REV.									
DATE.									
DESCRIPTION.									
CHANGE.									
CHECK.									
APPRO.									