


RECOMMENDED PCB LAYOUT
(ALL TOLERANCES ARE ±0.05)

- SPECIFICATIONS:
1. Voltage: 150V AC RMS
 2. Current Rating: 1.5A
 3. Contact Resistance: 30mΩ MAX.
 4. Insulation Resistance: 500MΩ MIN.
 5. Dielectric Withstand Voltage: 1000V AC
 6. Operating Temperature: -40°C~80°C
 7. Durability: 500 Mating Cycles MIN.

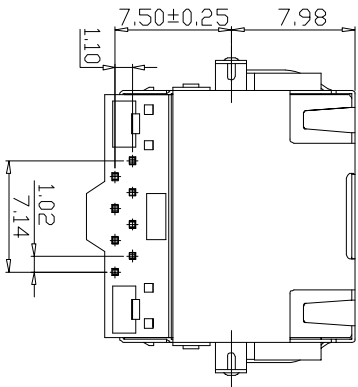

NO.	PART NAME	QTY	MATERIAL	Material & Plating	Remark
3	Shielding	1	Brass	Ni Plating	
2	Terminal	8	Phosphor Bronze	PLATING & COLOR	
1	Housing	1	PBT	BLACK	

APPROVALS		DATE	TITLE:
DRAWN	ZHANGJEN	2015.07.07	RJ CONNECTOR



ECN NO.	REV.	DATE	DESCRIPTION	CHANGE.	CHECK.	APPRD.
	A		NEW			

CHECKED		APPROVALS		TOLERANCES ARE	
30° ±0.1	±0.30	DATE	TITLE:	30° ±0.1	±0.30
6°30'	±0.20	PART NO.	RJ45-6W11-CDN-AA-88-1B1	6°30'	±0.20
5°30'	±0.15	UNIT: mm	SCALE: 1:1	5°30'	±0.15
5°	±0.10	DRAWING NO.		5°	±0.10