


- SPECIFICATIONS:
1. Voltage: 125V AC RMS
  2. Current Rating: 1.5A
  3. Contact Resistance: 40mΩ MAX.
  4. Insulation Resistance: 500MΩ MIN.
  5. Dielectric Withstand Voltage : 500V DC
  6. Operation Temperature: -40C~80°C
  7. Durability: 500 Mating Cycles MIN.

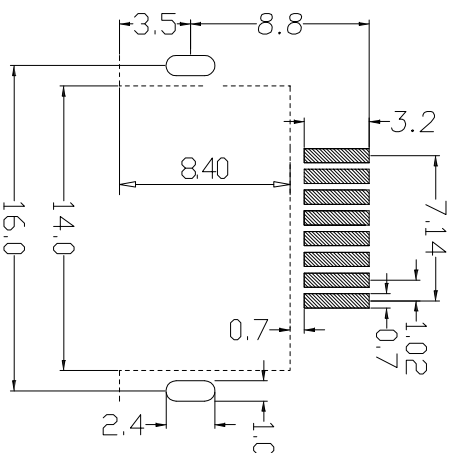

RECOMMENDED PCB LAYOUT (TOP VIEW)  
 (ALL TOLERANCES ARE ±0.05)

3	Shielding	1	Bross	Ni Plating
2	Terminal	8	Phosphor Bronze	PLATING & COLOR
1	Housing	1	LCP+15% G.F UL94V-0	BLACK
NO.	PART NAME	Q'TY	MATERIAL	Remark

APPROVALS		DATE	
DRAWN		ZHANGCHEN 2015.07.07	
CHECKED			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES 30~12.5 ±0.30 12.5~5 ±0.20 5~10 ±0.15 ~5 ±0.10						
APPROVALS			TITLE:	RJ CONNECTOR		
PART NO.			RJ45-6W11-CSN-AB-88-B1			
UNIT: mm			SCALE: 1:1	PROJ.		
DRAWING NO.			SHEET 1 OF 1			