


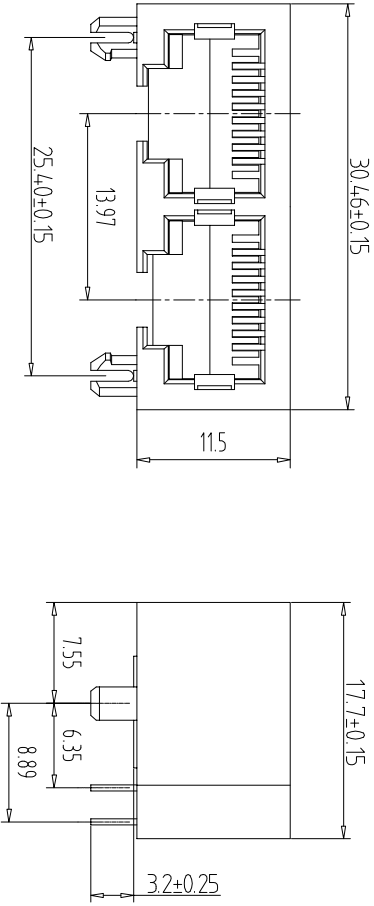

NOTES:

MATERIAL :

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE $\phi 0.45\text{mm}$.
- 3.PLATING :GOLD PLATING Fv" 50u" OVER NICKEL.

ELECTRICAL:



- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :15 AMP.
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50HZ. 1MIN.

MECHANICAL:

- 1.DURABILITY :750 CYCLES MIN.
- 2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40℃~+85℃
- 2. OPERATION : 02 TO 70℃.

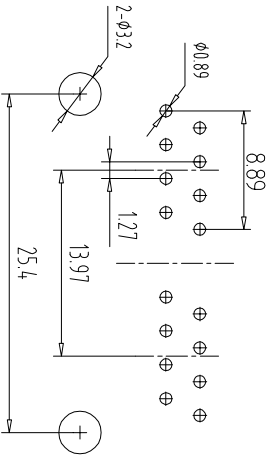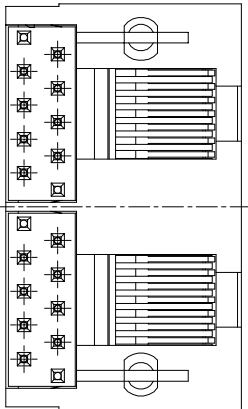

PC Board Layout
Component Side Shown

				APPROVALS		DATE		GEPU歌普			
				DRAWN		ZHIWEICHEN					
				CHECKED				TITLE:		RJ CONNECTOR	
				APPROVALS				PART NO.		RJ45-9W12-DDN-BB-88-B1	
				TOLERANCES ARE		30° 以上 10.30 5.10 -5		±0.30 ±0.20 ±0.15 ±0.10		ANGLE ±2°	
								UNIT: mm		SCALE: 1:1	
								DRAWING NO.		SHEET 1 OF 1	
								PROJ.			
											