

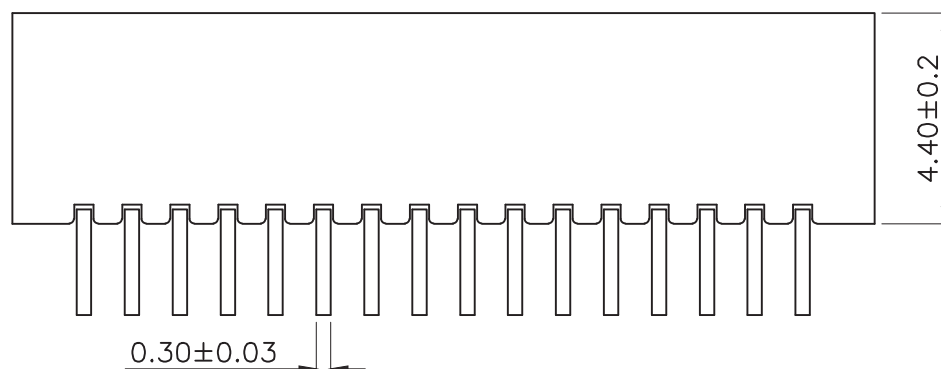
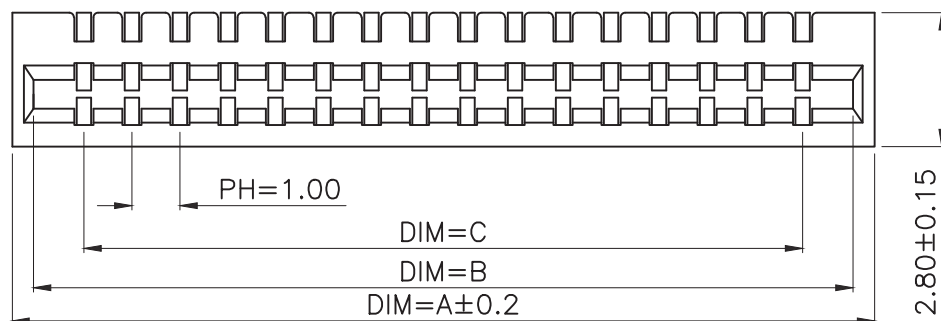


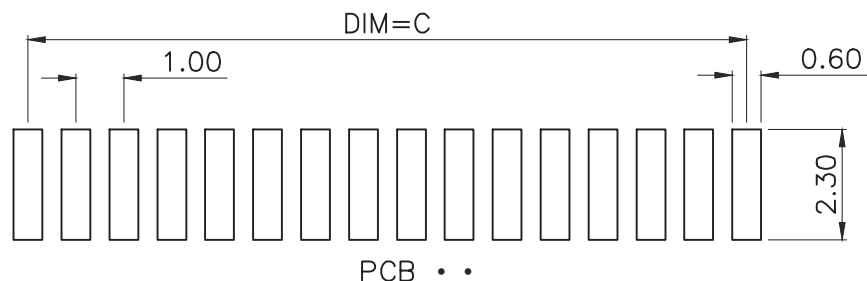

Electrical characteristics:
 Current rating: 0.5A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C~+85°C
 Withstand Voltage: 500V AC/Minute
 Contact Resistance: ≤20mΩ
 Insulation Resistance: ≥800mΩ

Material Description:
 Contact: Phosphor Bronze
 Tin-Leadplated
 Housing: Thermoplastic(UL94V-0)

PIN#	DIM=A	DIM=B	DIM=C
30P	32.0	31.10	29.00
29P	31.0	30.10	28.00
28P	30.0	29.10	27.00
27P	29.0	28.10	26.00
26P	28.0	27.10	25.00
25P	27.0	26.10	24.00
24P	26.0	25.10	23.00
23P	25.0	24.10	22.00
22P	24.0	23.10	21.00
21P	23.0	22.10	20.00
20P	22.0	21.10	19.00
19P	21.0	20.10	18.00
18P	20.0	19.10	17.00
17P	19.0	18.10	16.00
16P	18.0	17.10	15.00
15P	17.0	16.10	14.00
14P	16.0	15.10	13.00
13P	15.0	14.10	12.00
12P	14.0	13.10	11.00
11P	13.0	12.10	10.00
10P	12.0	11.10	9.00
9P	11.0	10.10	8.00
8P	10.0	9.10	7.00
7P	9.0	8.10	6.00
6P	8.0	7.10	5.00
5P	7.0	6.10	4.00
4P	6.0	5.10	3.00

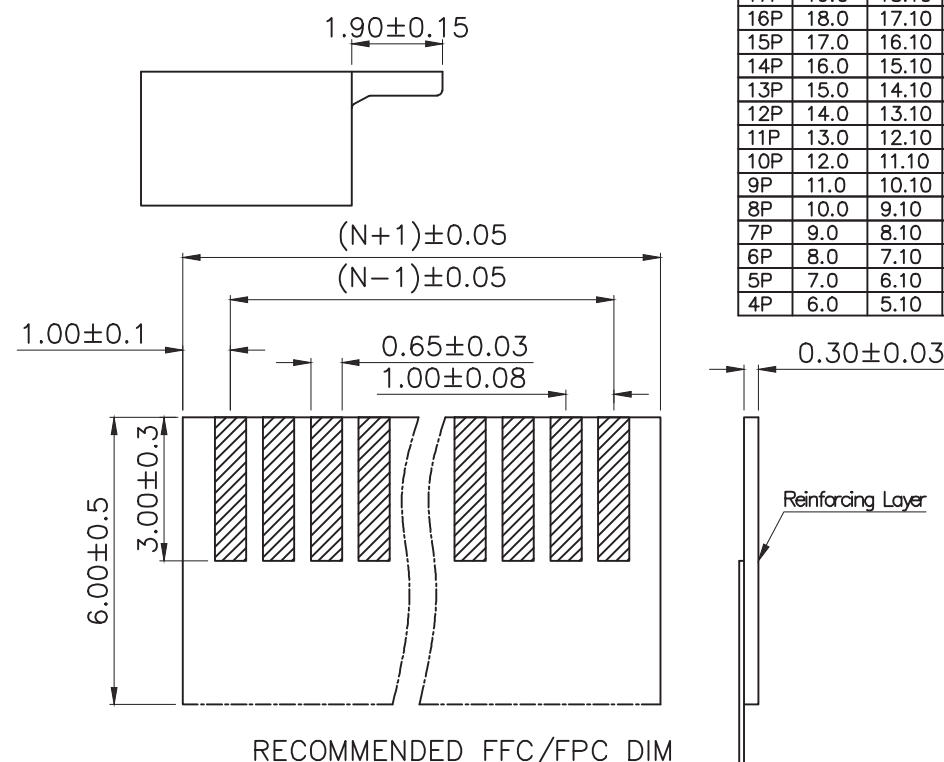

APPROVALS		DATE	GEPU 歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07		
CHECKED			TITLE:	FPC 1.00mm Connector
APPROVALS			PART NO.	GP10-WSWN-XXP-G-N01
TOLERANCES ARE			UNIT: mm	SCALE: 1:1
			DRAWING NO.	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			