
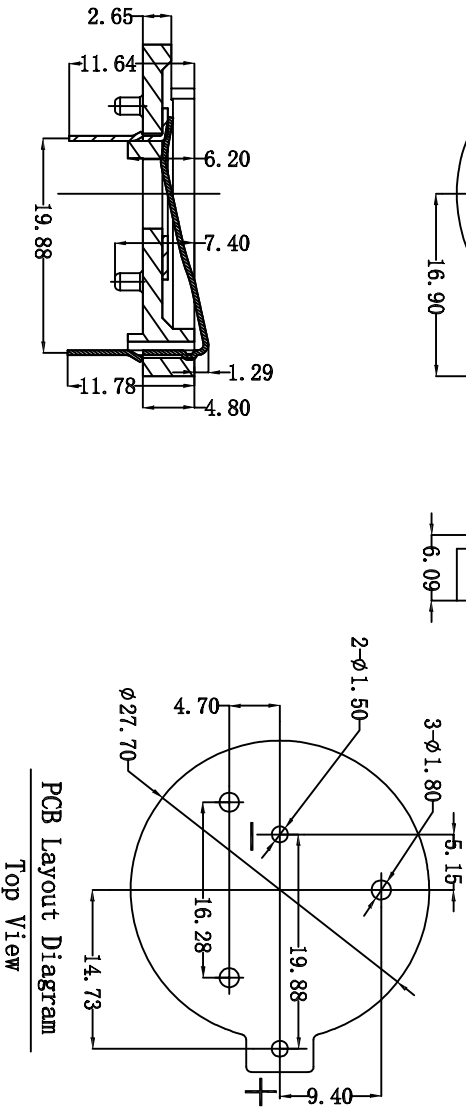
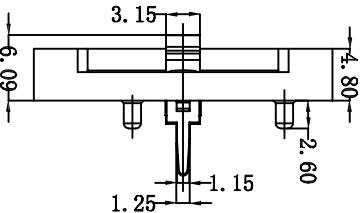
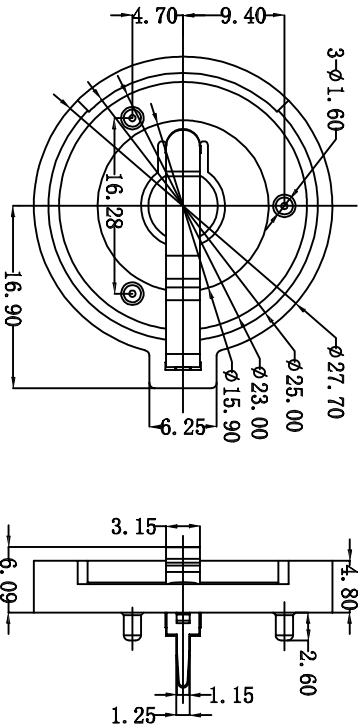




- NOTE:
1. MATERIAL:
- a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
 - b. CONTACT: Mn Steel
 - (SURFACE PLATING: Ni 100u")
- SEE ORDERING INFORMATION
2. ELECTRIC:
- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
 - b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
 - c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
 - d. OPERATING TEMPERATURE: -25° C ~ +85° C

3	TERMINAL (-)	1	Mn Steel, T=0.50MM	Ni-Plating
2	TERMINAL (+)	1	Mn Steel, T=0.50MM	Ni-Plating
1	HOUSING	1	PBT	BLACK
NO.	PART NAME	Q' TY	MATERIAL	PLATING & COLOR
	A		NEW	
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.
				CHECK.
				APPRO.
APPROVALS				
DRAWN		ZHIWEI.CHEN		DATE
				2015.07.07
CHECKED				TITLE:
				电池座
APPROVALS				PART NO.
				GP07-CR2430-01
TOLERANCES ARE				
30~0.1		±0.30	ANGLE	UNIT: mm
10~30		±0.20		SCALE: 1:1
5~10		±0.15		PROJ. 
~ 5		±0.10	±2°	DRAWING NO.
				SHEET 1 OF 1

GEPU 歌普