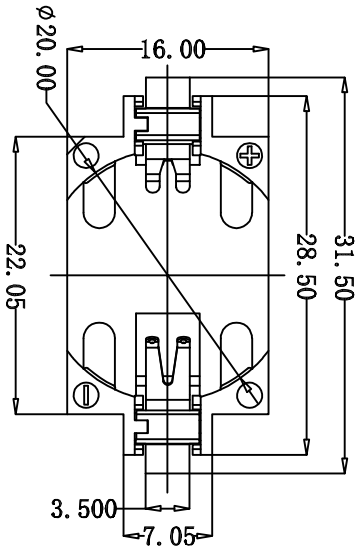


PCB Layout Diagram
Top View

NOTE:

1. MATERIAL:

- a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
- b. CONTACT: PHOSPHOR BRONZE (SURFACE PLATING: Sn100U")

SEE ORDERING INFORMATION

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
- d. OPERATING TEMPERATURE: -25° C ~ +85° C

3	TERMINAL (-)	1	PHOSPHOR BRONZE, T=0.15MM	Sn-Plating
2	TERMINAL (+)	1	PHOSPHOR BRONZE, T=0.15MM	Sn-Plating
1	HOUSING	1	LCP	WHITE
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
	A		NEW	
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE. CHECK. APPRO.

APPROVALS		DATE	GEPU 歌普	
DRAWN	ZHWEI.CHEN	2015.07.07		
CHECKED			TITLE:	电池座 SN SMT
APPROVALS			PART NO.	GP07-CR2032-12
TOLERANCES ARE		30~0.1 10~0.30 5~0.10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE UNIT: mm SCALE: 1:1 PROJ:
			±2'	DRAWING NO. SHEET 1 OF 1