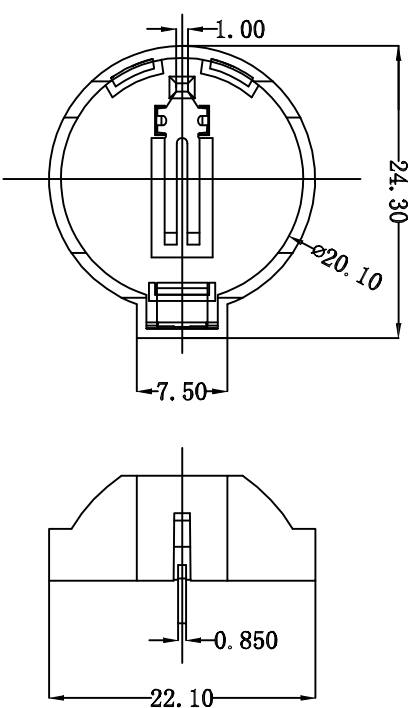


PCB Layout Diagram
Top View

NOTE:
1. MATERIAL:
a. HOUSING: PBT
b. CONTACT: BRASS
(SURFACE PLATING: Sn100u")
SEE ORDERING INFORMATION

2. ELECTRIC:
a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
d. OPERATING TEMPERATURE: -25° C ~ +85° C

3	TERMINAL (-)	1	BRASS, T=0.20MM	Sn-Plating					
2	TERMINAL (+)	1	BRASS, T=0.40MM	Sn-Plating					
1	HOUSING	1	PBT	BLACK					
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR					
	A		NEW						
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.			
				TOLERANCES ARE					
				30~0.15 10~0.30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1	PROJ. 
						±2°	DRAWING NO.		SHEET 1 OF 1

APPROVALS		DATE	GEPU歌普
DRAWN	ZHWEI.CHEN	2015.07.07	
CHECKED			
APPROVALS			
TITLE: 电池座			
PART NO.			GP07-CR2032-08