
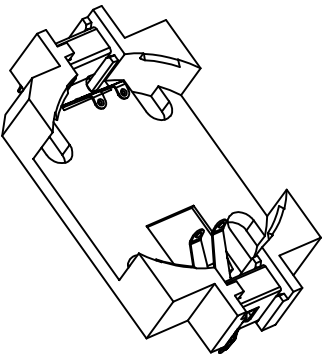


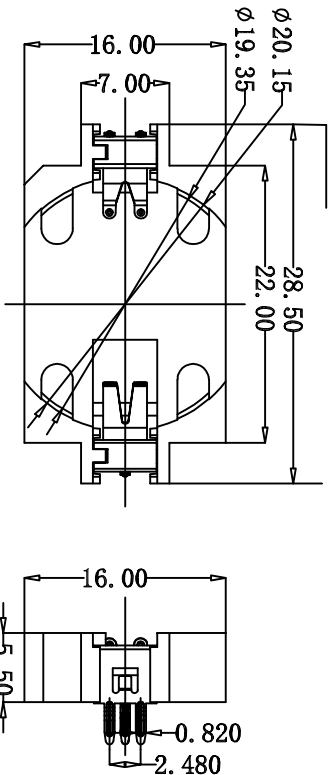

NOTE:


1. MATERIAL:

- a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
- b. CONTACT: PHOSPHOR BRONZE (SURFACE PLATING: Sn100u")

SEE ORDERING INFORMATION

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
- d. OPERATING TEMPERATURE: -25° C ~ +85° C

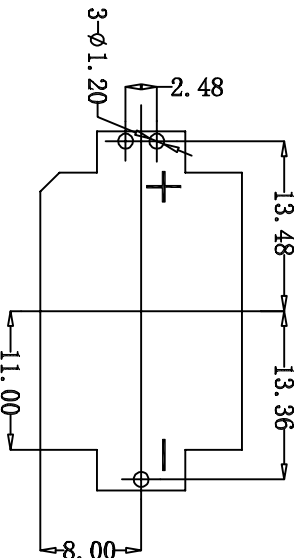

PCB Layout Diagram
Top View

3	TERMINAL (-)	1	PHOSPHOROUS BRONZE, T=0.15MM	Sn-Plating	
2	TERMINAL (+)	1	PHOSPHOROUS BRONZE, T=0.15MM	SnPlating	
1	HOUSING	1	LCP	WHITE	
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	
	A		NEW		
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.
					APPRO.
. APPROVALS		DATE	GEPU歌普		
DRAWN	ZHWEI.CHEN	2015.07.07			
CHECKED					
APPROVALS			PART NO.	GP07-CR2032-4	
TOLERANCES ARE		30~0.15 10~0.30 5~0.10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	±2°
			UNIT: mm	SCALE: 1:1	PROJ.
			DRAWING NO.		SHEET 1 OF 1