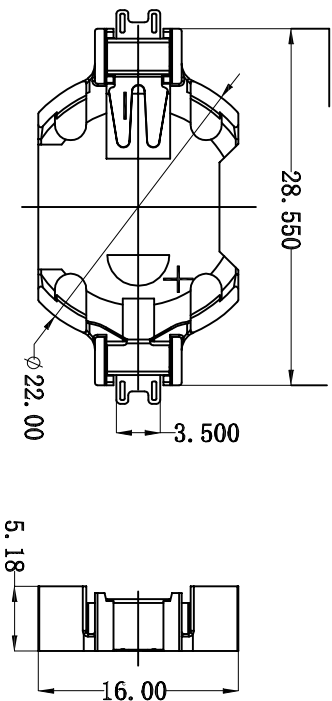


PCB Layout Diagram

Top View

3	TERMINAL (-)	1	PHOSPHOROUS BRONZE, T=0.15MM	Sn-Plating
2	TERMINAL (+)	1	PHOSPHOROUS BRONZE, T=0.15MM	Sn-Plating
1	HOUSING	1	LCP	WHITE
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR
	A		NEW	
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.

NOTE:
1. MATERIAL:
a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
b. CONTACT: PHOSPHOR BRONZE
(SURFACE PLATING: Sn100u")
SEE ORDERING INFORMATION

2. ELECTRIC:
a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
d. OPERATING TEMPERATURE: -25~C~+85~C

APPROVALS		DATE	TITLE: 电池座 SMT	
DRAWN	ZHWEI.CHEN	2015.07.07		
CHECKED			PART NO.	GP07-CR2032-03
APPROVALS			UNIT: mm	SCALE: 1:1
TOLERANCES ARE			DRAWING NO.	SHEET 1 OF 1
30~0.15		±0.30	ANGLE	PROJ
10~0.30		±0.20		
5~10		±0.15		
~5		±0.10		
		±2°		

GEPU 歌普