
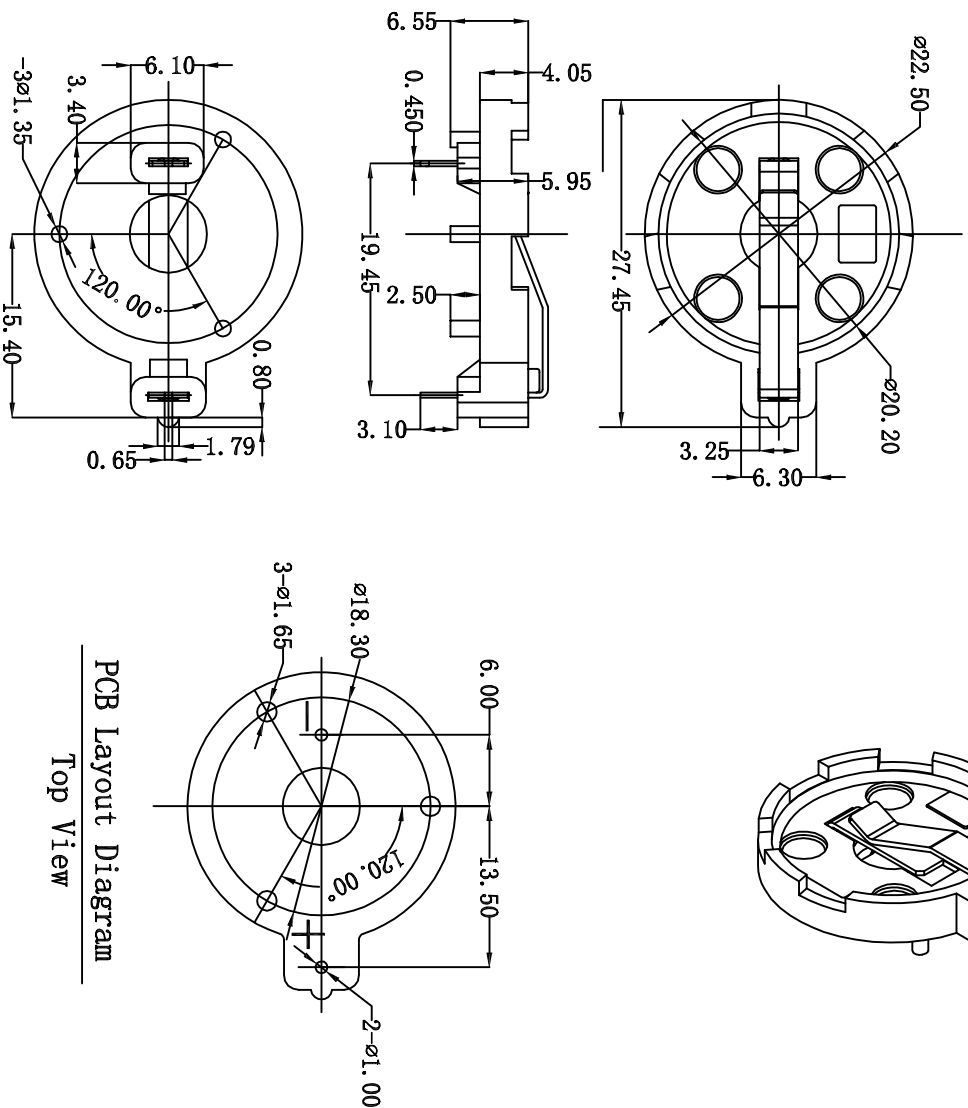


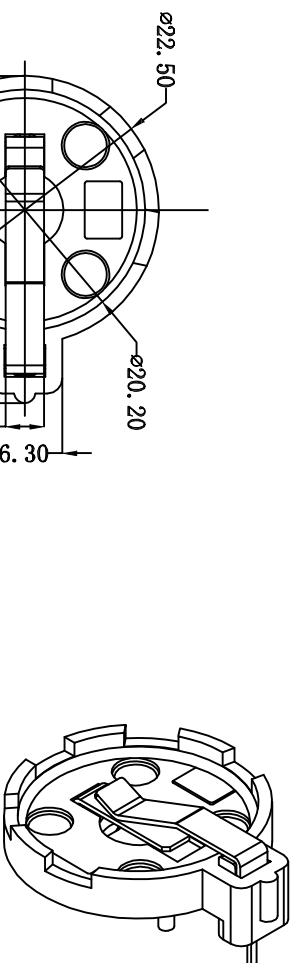

NOTE:

1. MATERIAL:

- a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
b. CONTACT: MN Steel
(SURFACE PLATING: Ni100u")

2. ELECTRIC:

- CONTACT RESISTANCE: 30 MILLIOMHS MAX
- INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
- OPERATING TEMPERATURE: -25°C ~ $+85^{\circ}\text{C}$

3	TERMINAL (-)	1	Mn Steel, T=0.45MM	Ni-Plating
2	TERMINAL (+)	1	Mn Steel, T=0.45MM	Ni-Plating
1	HOUSING	1	PBT	BLACK
NO	PART NAME	O' TY	MATPP1A1	PLATING & COI OP
	A		NEW	
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE. CHECK. APPRO.

APPROVALS		DATE
DRAWN	ZHIWEI.CHEN	2015.07.07
CHECKED		TITLE:
APPROVALS		PART NO.
		GPO7-CR2032-01
TOLERANCES ARE		UNIT: mm
30~100H	+0.30	ANGLE
10~30	+0.20	
3~10	+0.15	±2°
~ 5	+0.10	DRAWING NO.
		SHEET 1 OF 1

歌普

电池座