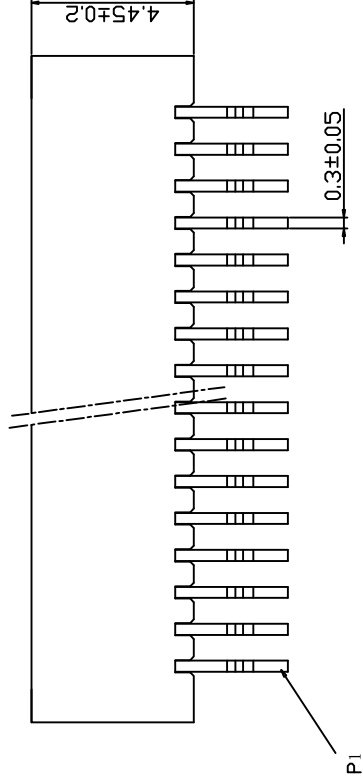
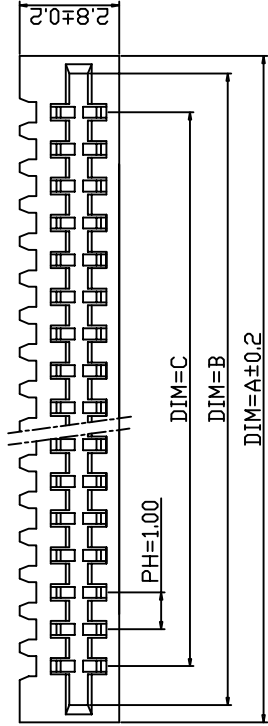
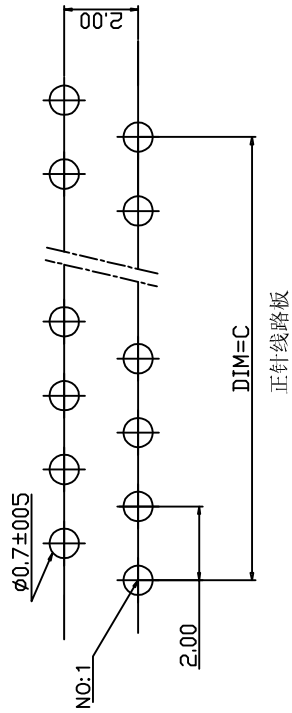


Electrical Characteristics:
Current rating: 0.5A AC/DC
Voltage rating: 50V AC/DC
Temperature range: -25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: $\leq 20m\Omega$
Insulation resistance: $\geq 800m\Omega$

Material Description:
Contact: Phosphor Bronze Tin-Leadplated
Housing: PBT(UL94V-0)

PIN数	DIM=A	DIM=B	DIM=C
30P	32.0	31.10	29.00
29P	31.0	30.10	28.00
28P	30.0	29.10	27.00
27P	29.0	28.10	26.00
26P	28.0	27.10	25.00
25P	27.0	26.10	24.00
24P	26.0	25.10	23.00
23P	25.0	24.10	22.00
22P	24.0	23.10	21.00
21P	23.0	22.10	20.00
20P	22.0	21.10	19.00
19P	21.0	20.10	18.00
18P	20.0	19.10	17.00
17P	19.0	18.10	16.00
16P	18.0	17.10	15.00
15P	17.0	16.10	14.00
14P	16.0	15.10	13.00
13P	15.0	14.10	12.00
12P	14.0	13.10	11.00
11P	13.0	12.10	10.00
10P	12.0	11.10	9.00
9P	11.0	10.10	8.00
8P	10.0	9.10	7.00
7P	9.0	8.10	6.00
6P	8.0	7.10	5.00

APPROVALS				DATE		TITLE:		FPC 1.00mm Connector	
DRAWN		ZHIWEI.CHEN		2015.07.07				GP10-LDWN-XXP-G-Z01	
CHECKED									
APPROVALS									
TOLERANCES ARE		30~以上 ± 0.30 10~30 ± 0.20 5~10 ± 0.15 ~ 5 ± 0.10		ANGLE		UNIT: mm		DRAWING NO.	
CHANGE.		CHECK.		APPRO.		SCALE: 1:1		PROJ.	
DESCRIPTION.								SHEET 1 OF 1	