

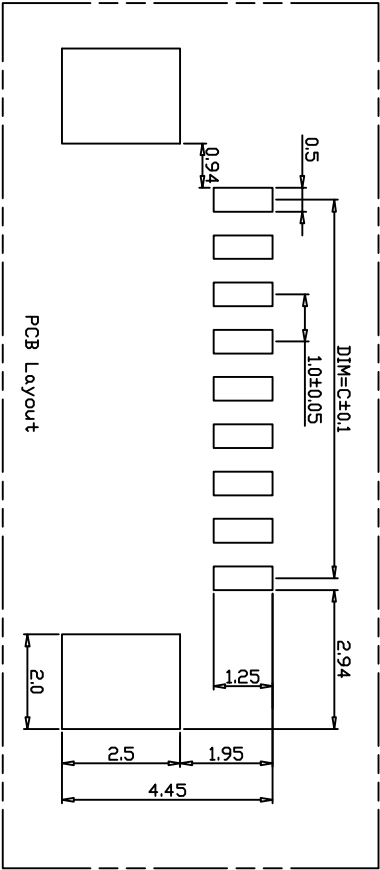
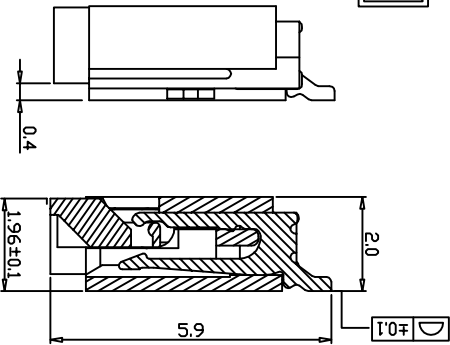


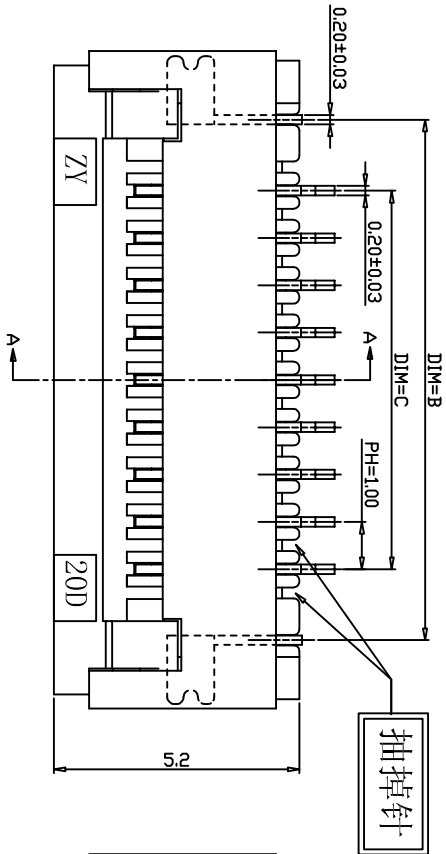

Electrical Characteristics:
Current rating: 0.5A AC/DC
Voltage rating: 50V AC/DC
Temperature range: -25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: ≤ 20mΩ
Insulation resistance: ≥ 800mΩ
Relative Humidity: 93%+40°C


Material Description:

Contact: Phosphor Bronze Tin-Leadplated
Solder Tab: Phosphor Bronze Tin-plated
Housing: Thermoplastic(UL94V-0)
Slider: Thermoplastic(UL94V-0)

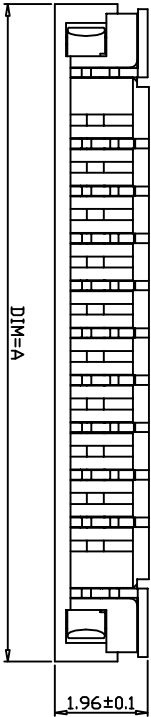

SECTION A-A

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
30P	34.9	32.00	29.00	31.10
29P	33.9	31.00	28.00	30.10
28P	32.9	30.00	27.00	29.10
27P	31.9	29.00	26.00	28.10
26P	30.9	28.00	25.00	27.10
25P	29.9	27.00	24.00	26.10
24P	28.9	26.00	23.00	25.10
23P	27.9	25.00	22.00	24.10
22P	26.9	24.00	21.00	23.10
21P	25.9	23.00	20.00	22.10
20P	24.9	22.00	19.00	21.10
19P	23.9	21.00	18.00	20.10
18P	22.9	20.00	17.00	19.10
17P	21.9	19.00	16.00	18.10
16P	20.9	18.00	15.00	17.10
15P	19.9	17.00	14.00	16.10
14P	18.9	16.00	13.00	15.10
13P	17.9	15.00	12.00	14.10
12P	16.9	14.00	11.00	13.10
11P	15.9	13.00	10.00	12.10
10P	14.9	12.00	9.00	11.10
9P	13.9	11.00	8.00	10.10
8P	12.9	10.00	7.00	9.10
7P	11.9	9.00	6.00	8.10
6P	10.9	8.00	5.00	7.10
5P	9.9	7.00	4.00	6.10
4P	8.9	6.00	3.00	5.10
3P	7.9	5.00	2.00	4.10
2P	6.9	4.00	1.00	3.10

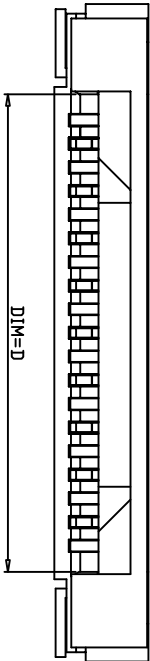

APPROVALS		DATE	GEPU 歌普			
DRAWN	ZHWEI.CHEN	2015.07.07	FPC 1.00mm Connector			
CHECKED			TITLE:			
APPROVALS			PART NO.	GP10-WSHA-XXP-C-X01	SCALE: 1:1	PROJ.
TOLERANCES ARE			UNIT: mm			SHEET 1 OF 1
	30~0.1	±0.30	ANGLE			
	10~30	±0.20				
	5~10	±0.15				
	~5	±0.10				
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			