




$A: (1.0 * PIN + 0.3) \pm 0.30$

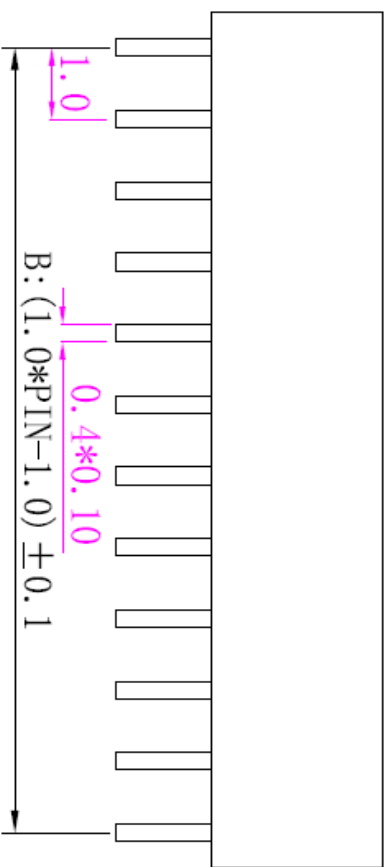

SPECIFICATIONS

Current Rating: 1Amps
Insulator Resistance: 5000Megohms min.
Dielectric Withstanding: AC 500v
Operating Temperature: -40°C ~+105°C
Contact Material: Brass
Insulator Material: NYL-6T
Finish: Gold flash

UNSPECIFIED TOLERANCE: ±0.20

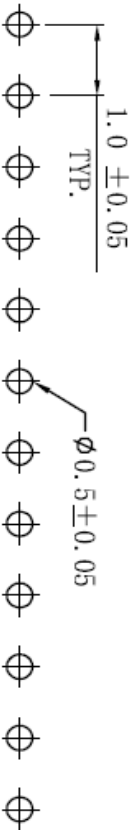

				APPROVALS		DATE		GEPU歌普													
				DRAWN		ZHIWEI.CHEN		2015.07.07													
				CHECKED						TITLE:											
				APPROVALS						PART NO. GP25-1002WV-XP											
				TOLERANCES ARE		30~0.15 10~0.30 5~10 ~5		±0.30 ±0.20 ±0.15 ±0.10		ANGLE		UNIT: mm		SCALE: 1:1		PROJ. 				SHEET 1 OF 1	
				NEW																	
				A																	
				REV.																	
				DATE.																	
				DESCRIPTION.																	
				CHANGE.																	
				CHECK.																	
				APPRO.																	
				ECN NO.																	