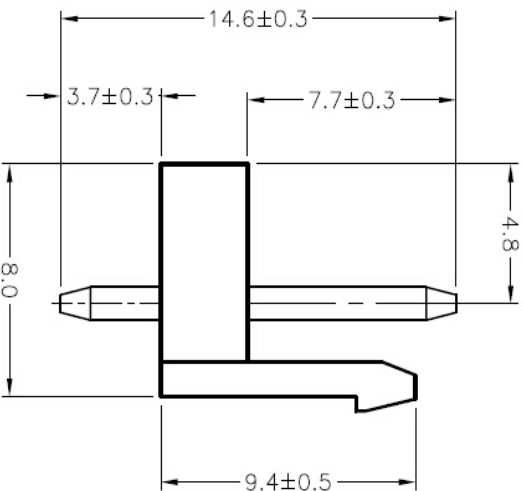
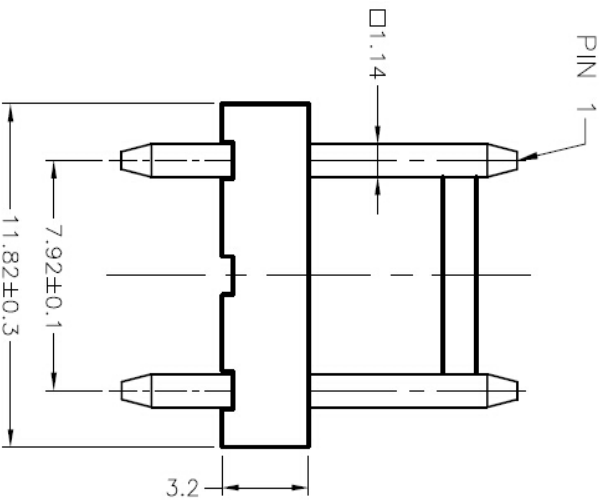


RECOMMENDED HOLE PATTERN

- 技术参数 SPECIFICATIONS
- ◆ 适用线规: AWG.#18~#22
 - ◆ Applicable Wire: AWG.#18~#22
 - ◆ 额定电压: 250V DC/AC(rms)
 - ◆ Rated voltage: 250V DC/AC(rms)
 - ◆ 额定电流: 7A(AWG.#18)
 - ◆ Rated Current: 7A(AWG.#18)
 - ◆ 耐压值: 1500V AC/minute
 - ◆ Withstand voltage: 1500V AC/min.
 - ◆ 工作温度: -25℃ ~ +85℃
 - ◆ Working Temp : -25℃ ~ +85℃
 - ◆ 绝缘电阻: ≥1000 MΩ
 - ◆ Insulation resistance: ≥1000 MΩ
 - ◆ 接触电阻: ≤10 mΩ
 - ◆ Contact resistance: ≤10 mΩ
- 材料 MATERIAL
- ◆ 绝缘体: 尼龙66, UL94-V0
 - ◆ Insulator: Nylon66, UL94-V0
 - ◆ 接触针: 黄铜
 - ◆ Finish: Tin-plating

APPROVALS		DATE	GEPU 歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07				
CHECKED			TITLE: 3.96mm 3P2针			
APPROVALS			PART NO.	GP01-3961WV-XP-2		
TOLERANCES ARE		30~0.1 10~0.30 5~0.10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1
				±2°	DRAWING NO.	PROJ. SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			