


Specifications/备注 (Remark)

1-材料 (MATERIAL)
胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色
Housing:LCP+30%G.F UL94V-0,Color:Black
四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN
Contact: Brass/0.8u"MIN GOLD PLATING
OVER ALL 30u"MIN NICKEL UNDERPLATING
OVER ALL
2-特性 (characteristics):
额定电流: 0.75 AMP
Rating Current:0.75 AMP
接触阻抗: 20mΩ MAX.
Contact Resistance:20mΩ MAX.
绝缘阻抗: 1000MΩMIN.
Insulating Resistance:1000MΩMIN.
耐电压: AC 500V.
Withstanding Voltage:AC 500V.
温度范围: -40度至+105度
Temperature Range: -40°Cto +105°C

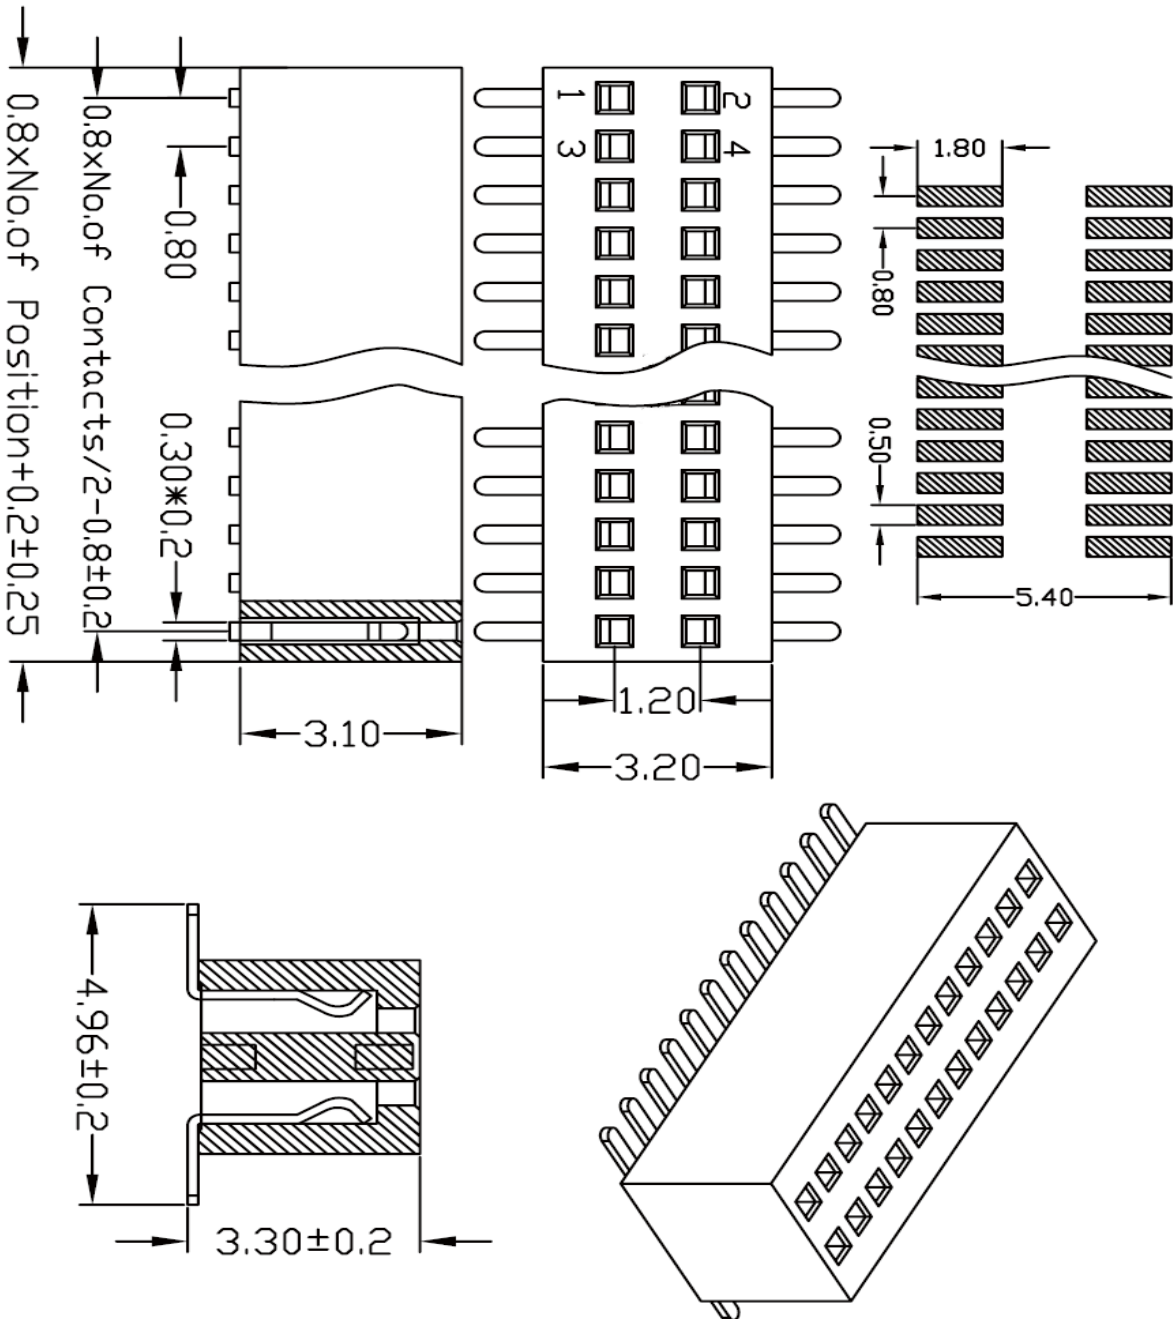

				APPROVALS		DATE		GEPU 歌普			
				DRAWN		2015.07.07					
				ZHIWEI.CHEN							
				CHECKED				TITLE:			
				APPROVALS				PART NO.			
								GP25-0811WVS-2XNP			