


Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PA9T/LCP+30%G.F UL94V-0, 颜色: 黑色  
 Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black  
 四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN  
 Contact: Brass/0.8u"MIN GOLD PLATING  
 OVER ALL 30u"MIN NICKEL UNDERPLATING  
 OVER ALL

2-特性 (characteristics):

额定电流: 1 AMP  
 Rating Current: 1 AMP  
 接触阻抗: 20mΩ MAX.  
 Contact Resistance: 20mΩ MAX.  
 绝缘阻抗: 1000MΩMIN.  
 Insulating Resistance: 1000MΩMIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40度至+105度  
 Temperature Range: -40°C to +105°C

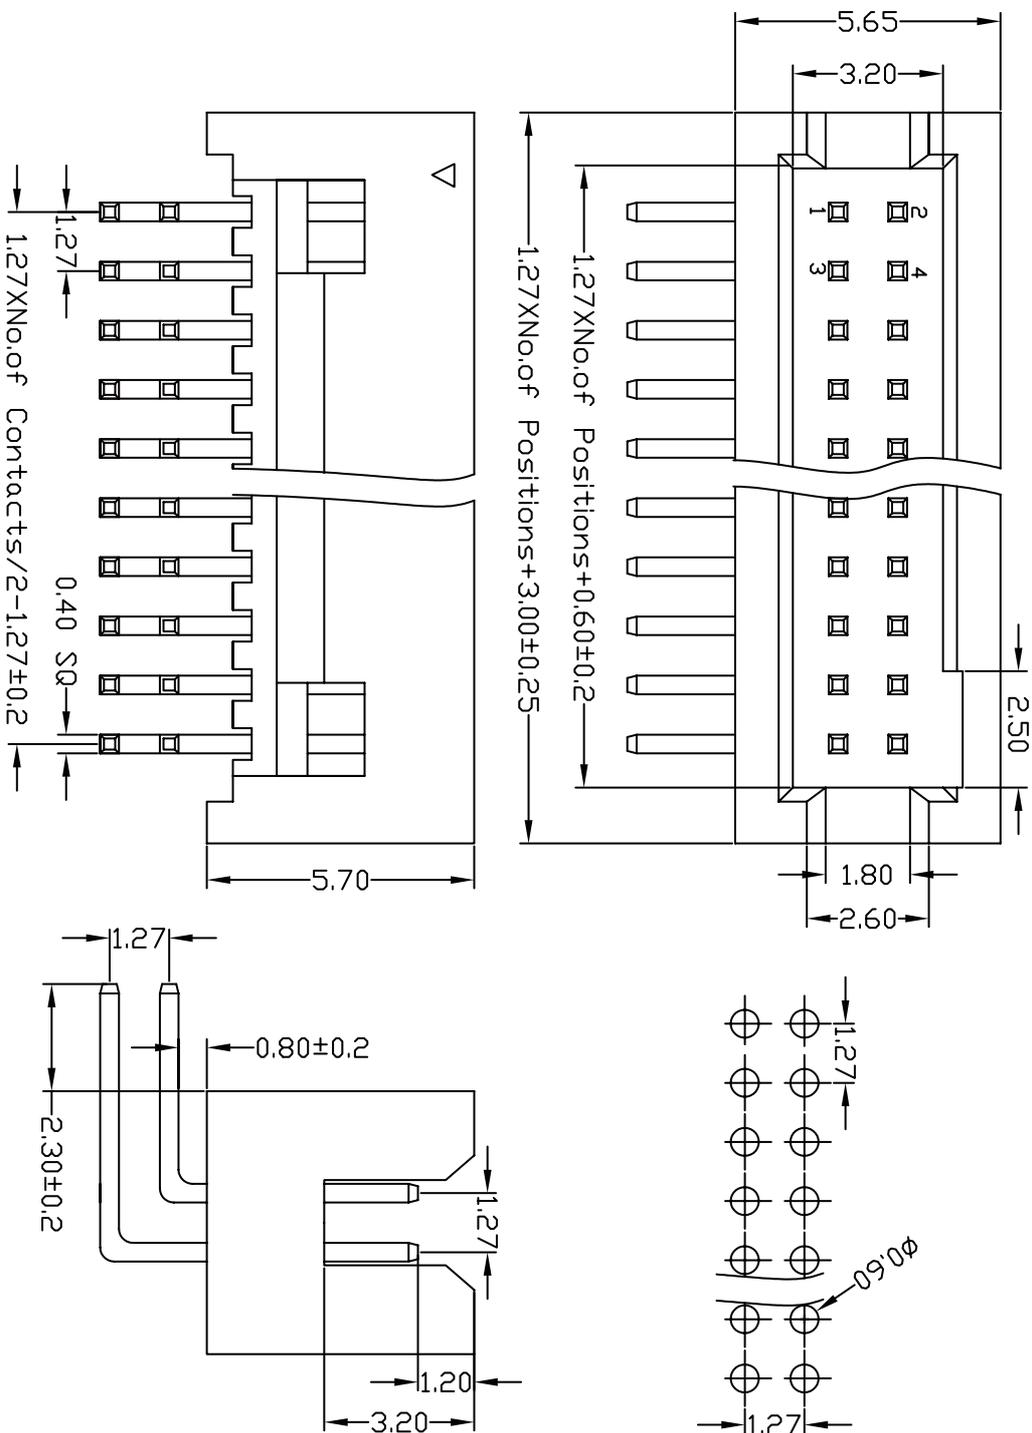

ECN NO.	REV.	DATE.	DESCRIPTION.
	A		NEW

APPROVALS		DATE	
DRAWN	ZHIWEI, CHEN	2015.07.07	
CHECKED			
APPROVALS		TITLE:	
TOLERANCES ARE		PART NO.	
30~0.15	±0.30	GP23-1272WR-2XNP	
10~0.30	±0.20	UNIT: mm	
5~10	±0.15	SCALE: 1:1	
~5	±0.10	PROJ.	
		DRAWING NO.	
		SHEET 1 OF 1	



1.27mm 简易牛角 90度