
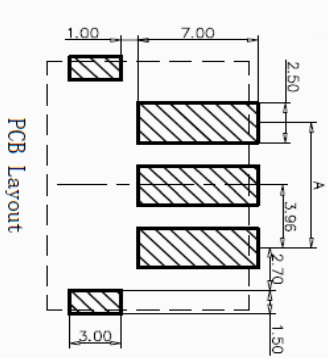
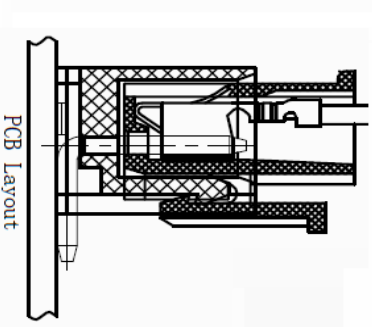

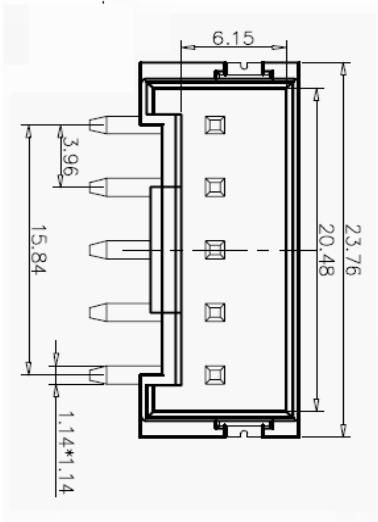



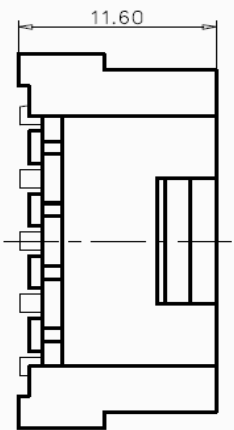

Electrical properties

- 1 Current rating:7A AC/DC (AWG #26)
- 2 Voltage rating: 250V AC/DC
- 3 Temperature range: -25℃ to 85℃
- 4 Contact resistance:Initial value/30m Ω max
- 5 Insulation resistance:1000M Ω min
- 6 Withstanding voltage:1000V AC/ minute
- 7 Applicable wire:AWG #18 to #22

Environmental controls

- 1 Banned contains SS - 00259 are restricted substance
 - 2 The corresponding issued by SGS or ITS iop-ae data
- Not the material in a list, and validity.

Pin	A	B	C
2	3.96	11.88	8.6
3	7.92	15.84	12.56
4	11.88	19.8	16.52
5	15.84	23.76	20.48
6	19.8	27.72	24.44
7	23.76	31.68	28.4
8	27.72	35.64	32.36
9	31.68	39.6	36.32
10	35.64	43.56	40.28

APPROVALS		DATE		GEPU歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07			
CHECKED					
APPROVALS				TITLE:	
TOLERANCES ARE		PART NO.		GP01-3961WVS-NP	
30~0.1		±0.30		ANGLE	
10~30		±0.20		UNIT: mm	
5~10		±0.15		SCALE: 1:1	
~5		±0.10		PROJ.	
		±2°		DRAWING NO.	
				SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			