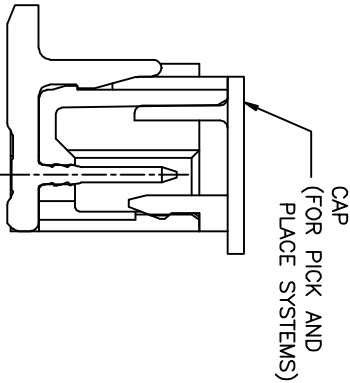

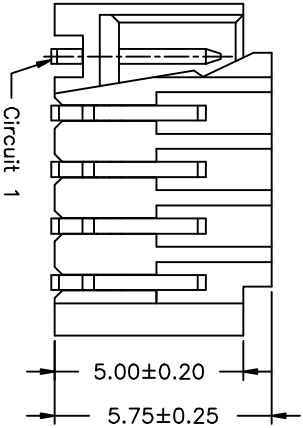

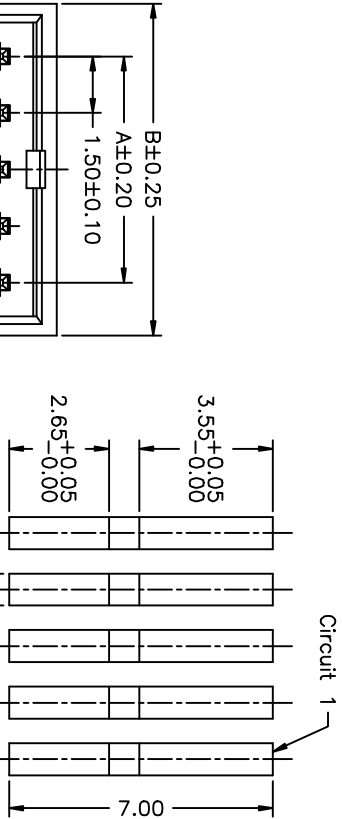



SPECIFICATIONS
Current Rating: 3A AC,DC
Voltage Rating: 350V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Material: LCP,UL94V-0
Color: Natural(Beige)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
02P	1.50	4.30
03P	3.00	5.80
04P	4.50	7.30
05P	6.00	8.80
06P	7.50	10.30
07P	9.00	11.80
08P	10.50	13.30
09P	12.00	14.80
10P	13.50	16.30
11P	15.00	17.80
12P	16.50	19.30
13P	18.00	20.80
14P	19.50	22.30
15P	21.00	23.80

APPROVALS		DATE	GEPU歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07		
CHECKED			TITLE: 1.50mm PITCH	
APPROVALS				
TOLERANCES ARE			PART NO.	GP01-1502WV-S-NP
30~0.15 10~30 5~10 ~5		±0.30 ±0.20 ±0.15 ±0.10	ANGLE	SCALE: 1:1
		±2°	UNIT: mm	PROJ
			DRAWING NO.	SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.	
	A		NEW	