

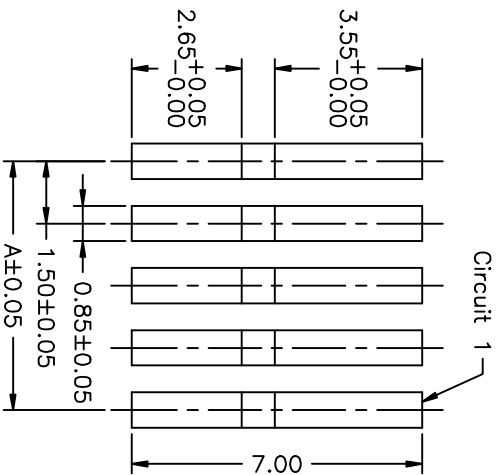
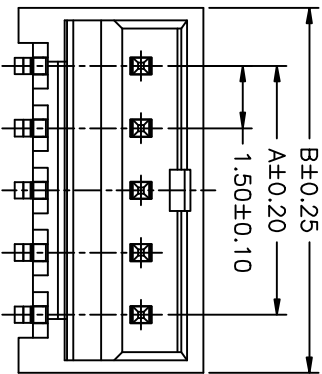


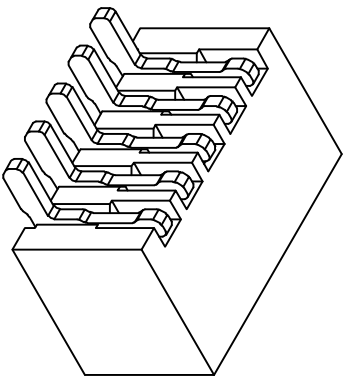

PCB LAYOUT

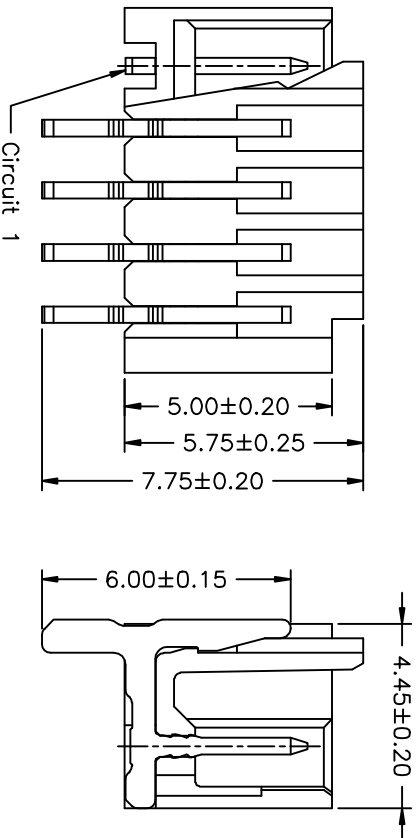

SPECIFICATIONS
Current Rating: 3A AC,DC
Voltage Rating: 350V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Material: LCP,UL94V-0
Color: Natural(Beige)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
02P	1.50	4.30
03P	3.00	5.80
04P	4.50	7.30
05P	6.00	8.80
06P	7.50	10.30
07P	9.00	11.80
08P	10.50	13.30
09P	12.00	14.80
10P	13.50	16.30
11P	15.00	17.80
12P	16.50	19.30
13P	18.00	20.80
14P	19.50	22.30
15P	21.00	23.80

APPROVALS		DATE		GEPU歌普							
DRAWN	ZHIWEI.CHEN	2015.07.07									
CHECKED											
APPROVALS				TITLE: 1.50mm PITCH							
TOLERANCES ARE		30~0.15 10~0.30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	PART NO. GP01-1502WR-S-NP						
ECN NO.		REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	UNIT: mm	SCALE: 1:1	PROJ.	SHEET 1 OF 1
NEW											