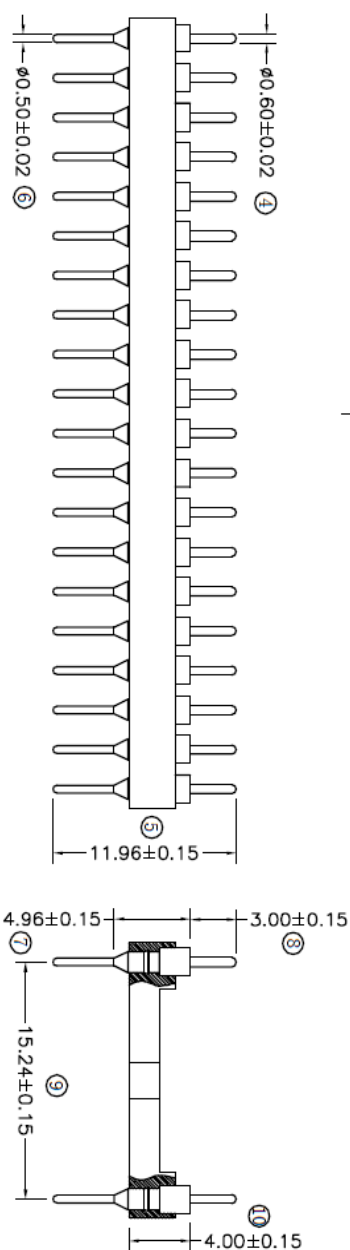
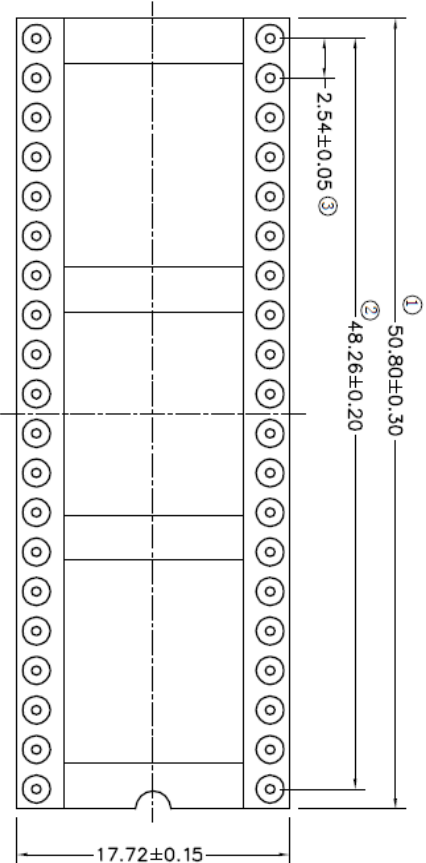


Technical Data
Material:
Pin(outer sleeve):Brass,machined CuZn38Pb2
Plating(outer sleeve):
Tin Plated:2 μ m/80 μ "Ni, 5 μ m/200 μ "Sn
Gold Plated:2 μ m"/80 μ "Ni, 0.8 μ " gold
Insulator:PPS UL94V-0

Electrical:
Current rating:3Amps/contact max.
Contact resistance: $\leq 4m\Omega$ /contact
Insulation resistance: $\geq 1000M\Omega$ at V=100V
Operating voltage:60VAC/DC

Mechanical:
Operating temperature:-40 ° C to+105 ° C
Soldering temperature:+255 ° C
Critical Dimensions:⊗

APPROVALS			DATE		TITLE:		
DRAWN	ZHIWEI.CHEN		2015.07.07		PART NO.	GP28-1524WV-2xNP-1196A	
CHECKED					SCALE:	1:1	PROJ.
APPROVALS					UNIT:	mm	SHEET 1 OF 1
TOLERANCES ARE			30~0.15	±0.30	ANGLE		
			10~30	±0.20			
			5~10	±0.15			
			~ 5	±0.10	±2°		
DRAWING NO.							
ECN NO.							
REV.	DATE.	DESCRIPTION.		CHANGE.	CHECK.	APPRO.	
A		NEW					