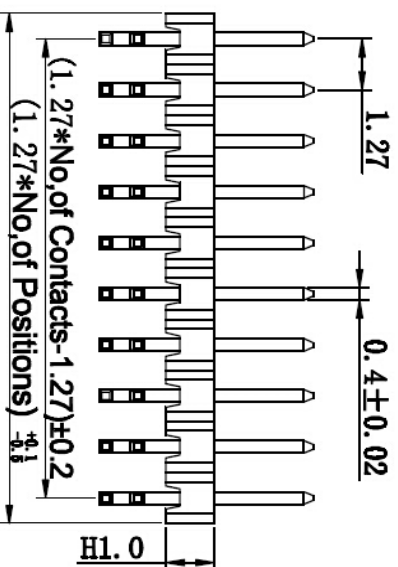
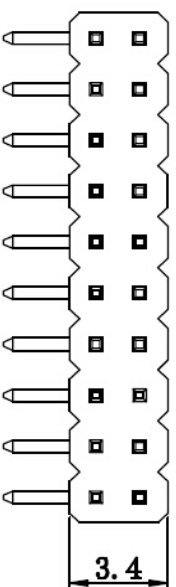


SPECIFICATIONS

Current Rating:	1Amps
Insulator resistance:	500 Megohms min.
Dielectric Withstanding:	AC 500V
Operating Temperature:	-40°C to +105°C
Insulator Material:	NY-6T
Contact Material:	Brass
Plating:	Gold flash

UNSPECIFIED TOLERANCE: ± 0.20

Dimensions List

Comitatus Per Row		A	B	Comitatus Per Row		A	B
2*02	2.54	1.27	2*22	27.94	26.67		
2*03	3.81	2.54	2*23	29.21	27.94		
2*04	5.08	3.81	2*24	30.48	29.21		
2*05	6.35	5.08	2*25	31.75	30.48		
2*06	7.62	6.35	2*26	33.02	31.75		
2*07	8.89	7.62	2*27	34.29	33.02		
2*08	10.16	8.89	2*28	35.56	34.29		
2*09	11.43	10.16	2*29	36.83	35.56		
2*10	12.70	11.43	2*30	38.70	36.83		
2*11	13.97	12.70	2*31	39.37	38.10		
2*12	15.24	13.97	2*32	40.64	39.37		
2*13	16.51	15.24	2*33	41.91	40.64		
2*14	17.78	16.51	2*34	43.18	41.91		
2*15	19.05	17.78	2*35	44.45	43.18		
2*16	20.32	19.05	2*36	45.72	44.45		
2*17	21.59	20.32	2*37	46.99	45.72		
2*18	22.86	21.59	2*38	46.99	54.61		
2*19	24.13	22.66	2*39	49.53	48.26		
2*20	25.40	24.13	2*40	50.80	49.53		
2*21	26.67	25.40					

		APPROVALS		DATE	 歌普		
		DRAWN	ZHIWEI.CHEN	2015.07.07			
		CHECKED					
		APPROVALS					
					TITLE:	1.27MM DIP 90 ° 排针	
					PART NO.	1270WR-2XNP	
					TOLERANCES ARE		
					30~0.15	±0.30	ANGLE
					10~.30	±0.20	
					5~.10	±0.15	
					~ 5	±.01	±2°
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	DRAWING NO.
	A		NEW				
							SCALE: 1:1
							PROJ. 
							SHEET 1 OF