
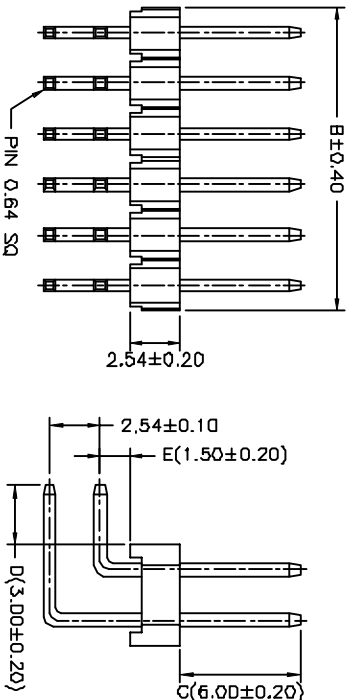
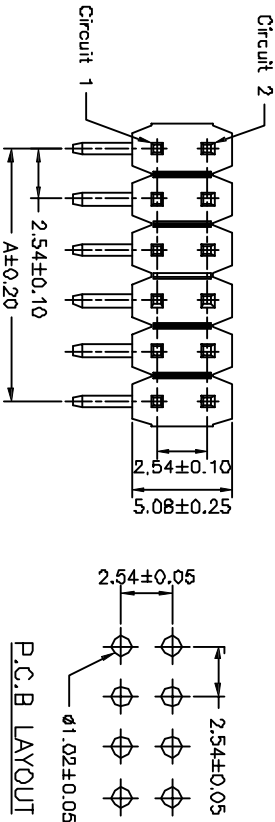


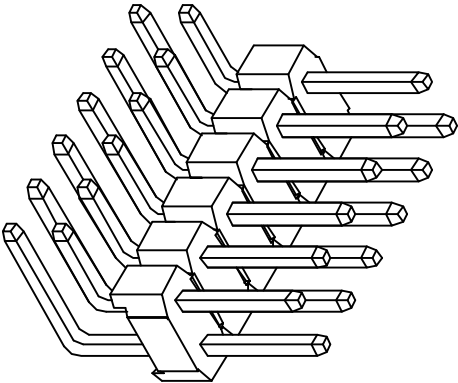

PART NO.	Dimensions		PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B		A	B
2X02P	2.54	5.08	2X15P	35.56	38.10	2X28P	68.58	71.12
2X03P	5.08	7.62	2X16P	38.10	40.64	2X29P	71.12	73.66
2X04P	7.62	10.16	2X17P	40.64	43.18	2X30P	73.66	76.20
2X05P	10.16	12.70	2X18P	43.18	45.72	2X31P	76.20	78.74
2X06P	12.70	15.24	2X19P	45.72	48.26	2X32P	78.74	81.28
2X07P	15.24	17.78	2X20P	48.26	50.80	2X33P	81.28	83.82
2X08P	17.78	20.32	2X21P	50.80	53.34	2X34P	83.82	86.36
2X09P	20.32	22.86	2X22P	53.34	55.88	2X35P	86.36	88.90
2X10P	22.86	25.40	2X23P	55.88	58.42	2X36P	88.90	91.44
2X11P	25.40	27.94	2X24P	58.42	60.96	2X37P	91.44	93.98
2X12P	27.94	30.48	2X25P	60.96	63.50	2X38P	93.98	96.52
2X13P	30.48	33.02	2X26P	63.50	66.04	2X39P	96.52	99.06
2X14P	33.02	35.56	2X27P	66.04	68.58	2X40P	99.06	101.60

Ordering Information & Dimensions

*Optional Dim. available but
MOQ requested*

SPECIFICATIONS
Current Rating: 3A AC/DC
Voltage Rating: 250V AC/DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold-Flash
Material: PBT30%GF-UL94V-0
Color: Natural(Black)

APPROVALS		DATE		GEPU歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07			
CHECKED					
APPROVALS				TITLE: 2.54mm Chmp Style Connector	
TOLERANCES ARE		30~0.10 10~30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	PART NO. GP26-2520WR-2XNP
				UNIT: mm	SCALE: 1:1
				DRAWING NO.	PROJ. SHEET 1 OF 1
ECN NO.		REV.	DATE.	DESCRIPTION.	
A				NEW	
				CHANGE.	
				CHECK.	
				APPRO.	