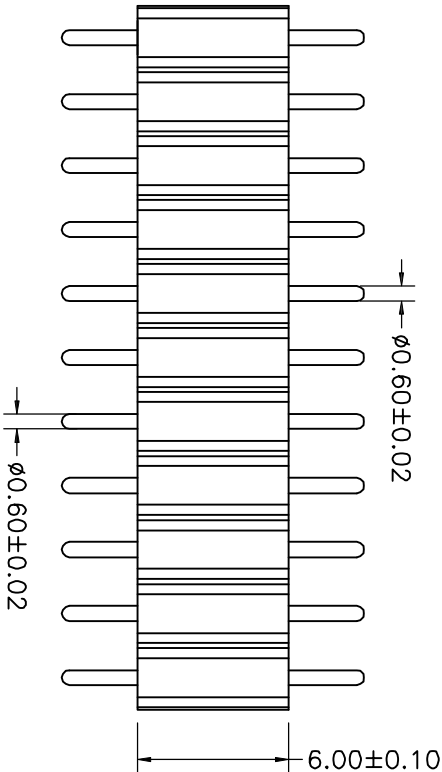
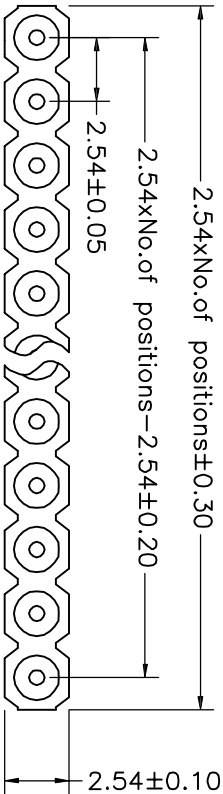


P.C.B LAYOUT

Technical Data
Material: Pin(outer sleeve):Brass,machined CuZn38Pb2
Plating(outer sleeve):
Tin Plated: 2μm/80μm”Ni,5μm/200 μ”Sn
Gold Plated: 2μm”/80 μm”Ni,0.8 μ” gold
Insulator: PPS UL94V-0

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Operating voltage: 60VAC/DC

Mechanical:
Mechanical life: min 500 cycle
Operating temperature: -40°C to +105°C
Soldering temperature: +255°C

APPROVALS			DATE		GEPU歌普			
DRAWN	ZHIWEI.CHEN		2015.07.07		TITLE: Socket Connectors 2.54mm L=12.00mm H=6.0mm			
CHECKED					PART NO. GP22-2520WVA-NP-1200A			
APPROVALS					SCALE: 1:1			
TOLERANCES ARE			30~0.15	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ.
			10~0.30	±0.20				
			5~10	±0.15				
			~ 5	±0.10	±2°	DRAWING NO.		SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.					
	A		NEW					