ROHS

www.gepu.tw

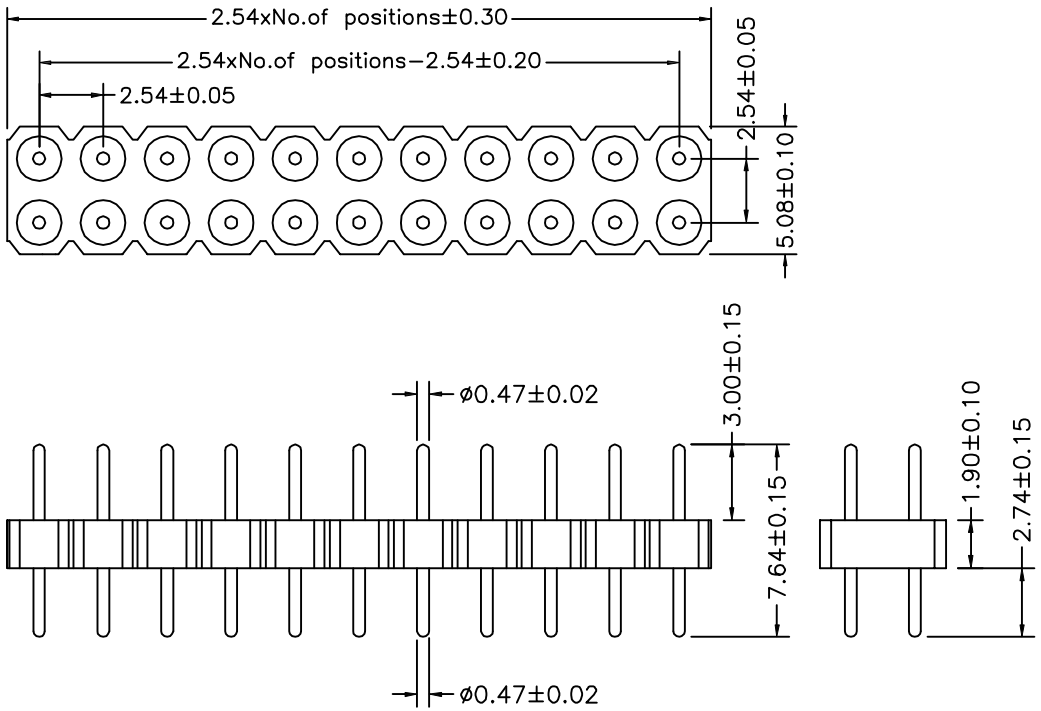

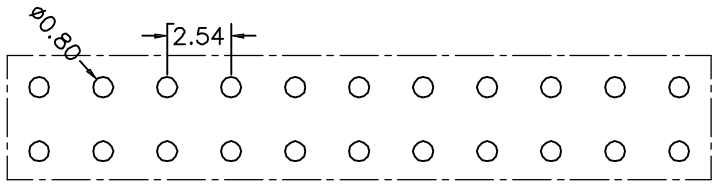

P.C.B LAYOUT

Technical Data

Materlal:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated: 2μm/80μm"NI,5μm/200 μ"Sn

Gold Plated: 2μm"/80 μm"Ni,0.8 μ" gold

Insuiator: PPS UL94V−0

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: ≤4mΩ/contact

Insuiation resistance: ≥1000MΩ at V=100V

Operaing voltage: 60VAC/DC

Mechanical:

Mechanical lige: min 500 cycle

Operaling temperature: −40°C to+105°C

Soldering temperature: +255°C

———	A	———	NEW	———	———	———
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

APPROVALS		DATE
DRAWN	ZHIWEI.CHEN	2015.07.07
CHECKED		
APPROVALS		

TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~ 5 ±0.10; ANGLE ±2°

GEPU 歌普

TITLE:	DubLe row socket connector 2.54mm L=7.64mm H=1.90
PART NO.	GP22-2520WV-2xNP-0764A
UNIT: mm	SCALE: 1:1
PROJ:	
DRAWING NO.	———
SHEET	1 OF 1