


2.00*2.00mm(0.079"0.079")BOX HEADER, RIGHT ANGLE

SPECIFICATIONS 规格


CURRENT RATING 电流额定值: 1.5AMP
 CONTACT RESISTANCE 接触电阻值: 20m Ω Max
 INSULATION RESISTANCE 绝缘电阻值: 1000M Ω Min
 DIELECTRIC WITHSTAND 耐压值: 500V AC/minute
 OPERATION TEMPERATURE 工作温度: -40°C to +105°C

CONTACT MATERIAL 端子材质: BRASS
 HOUSING MATERIAL 塑胶材质:
 STANDARD 标准物料: P16T + 30%G.F.; UL 94V-0; BLACK
 OPTIONS 可选物料: OR P16T + 30%G.F.; UL 94V-0; BLACK
 PLATING 电镀: Au or Sn Over 30u" Ni

2.00 $\pm$ 0.10

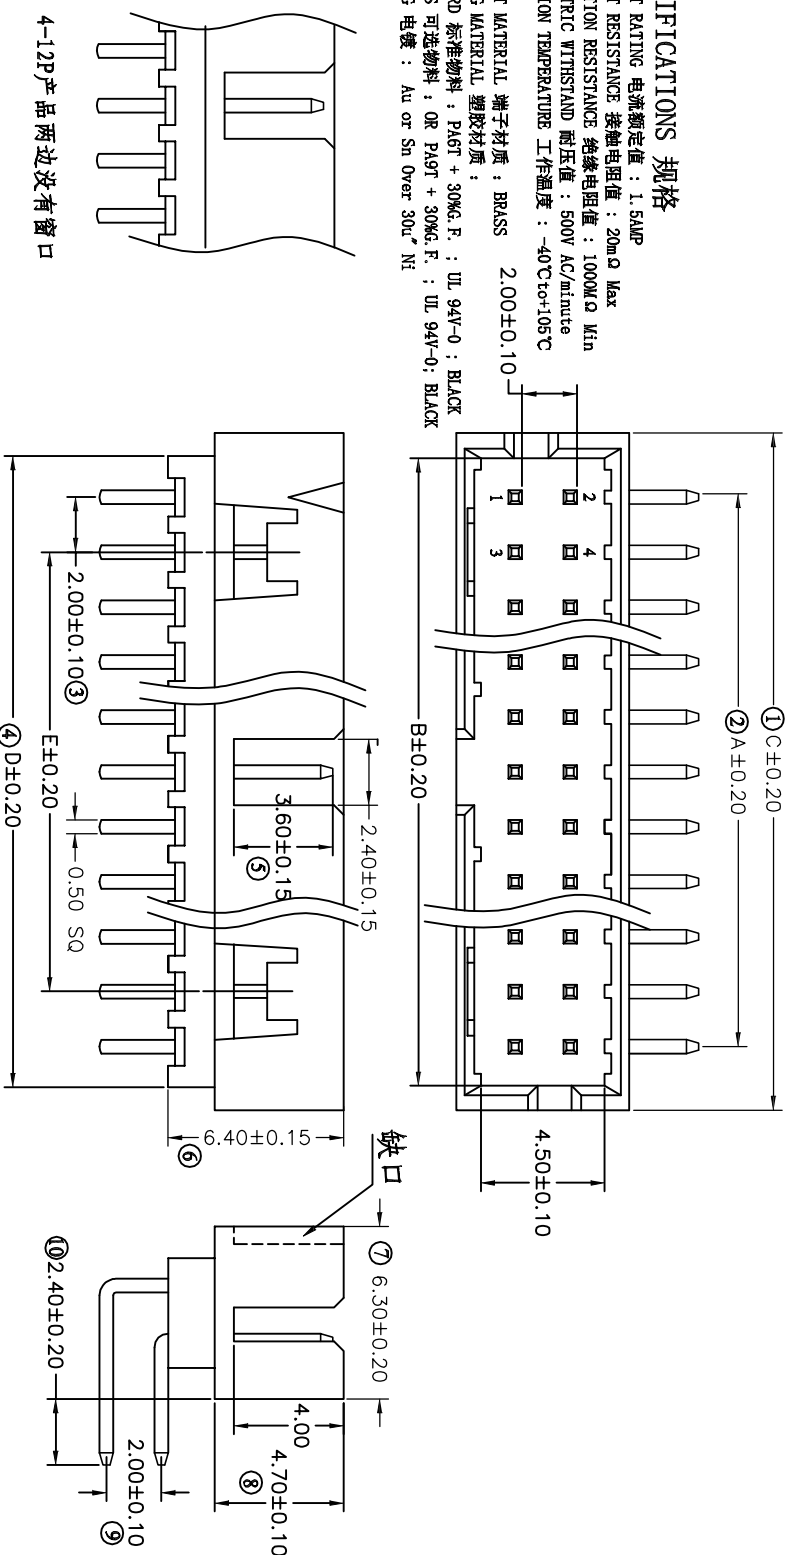

Ordering Information

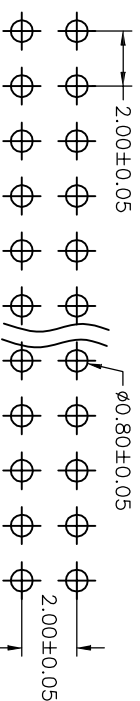

Recommended PCB Layout

0.5*10.5*14.5

D/M	A	B	C	D	E	P/N
4(222)	2.00	4.85	6.65	5.00	-	
6	4.00	6.85	8.65	7.00	-	
8	6.00	8.85	10.65	9.00	-	
10	8.00	10.85	12.65	11.00	-	
12	10.00	12.85	14.65	13.00	-	
14	12.00	14.85	16.65	15.00	8.00	
16	14.00	16.85	18.65	17.00	10.00	
18	16.00	18.85	20.65	19.00	12.00	
20	18.00	20.85	22.65	21.00	14.00	
22	20.00	22.85	24.65	23.00	16.00	
24	22.00	24.85	26.65	25.00	18.00	
26	24.00	26.85	28.65	27.00	20.00	
28	26.00	28.85	30.65	29.00	22.00	
30	28.00	30.85	32.65	31.00	24.00	
32	30.00	32.85	34.65	33.00	26.00	
34	32.00	34.85	36.65	35.00	28.00	
36	34.00	36.85	38.65	37.00	30.00	
38	36.00	38.85	40.65	39.00	32.00	
40	38.00	40.85	42.65	41.00	34.00	
42	40.00	42.85	44.65	43.00	36.00	
44	42.00	44.85	46.65	45.00	38.00	
46	44.00	46.85	48.65	47.00	40.00	
48	46.00	48.85	50.65	49.00	42.00	
50	48.00	50.85	52.65	51.00	44.00	

				APPROVALS		DATE		GEPU歌普	
				DRAWN		ZHIWEI.CHEN			
						2015.07.07			
				CHECKED					
				APPROVALS				PART NO.	
								GP23-2022WR-2XNP	
								TITLE:	
								2.00mm Crimp Style Connector	