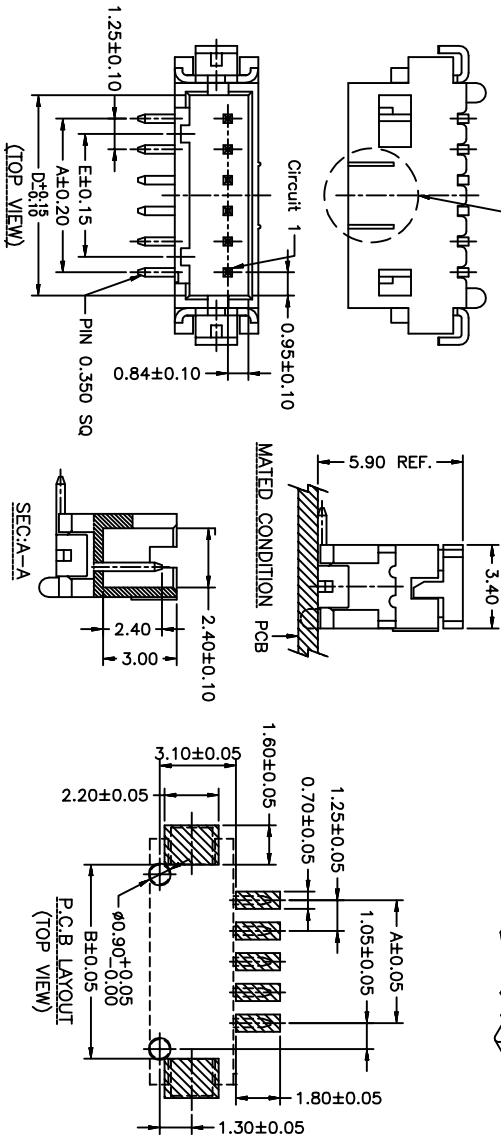
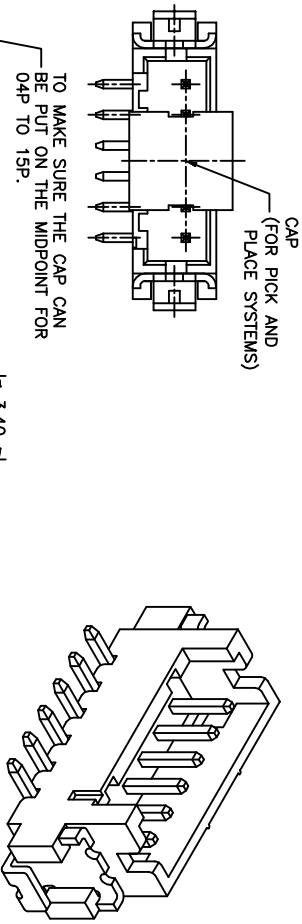


SPECIFICATIONS
Current Rating: 1A AC/DC
Voltage Rating: 150V AC/DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass
Solder Tabs: Phosphor Bronze

Circuit No.	Dimensions				
	A	B	C	D	E
02P	1.25	4.15	6.25	3.15	---
03P	2.50	5.40	7.50	4.40	1.25
04P	3.75	6.65	8.75	5.65	2.50
05P	5.00	7.90	10.00	6.90	3.75
06P	6.25	9.15	11.25	8.15	5.00
07P	7.50	10.40	12.50	9.40	6.25
08P	8.75	11.65	13.75	10.65	7.50
09P	10.00	12.90	15.00	11.90	8.75
10P	11.25	14.15	16.25	13.15	10.00
11P	12.50	15.40	17.50	14.40	11.25
12P	13.75	16.65	18.75	15.65	12.50
13P	15.00	17.90	20.00	16.90	13.75
14P	16.25	19.15	21.25	18.15	15.00
15P	17.50	20.40	22.50	19.40	16.25

APPROVALS		DATE	
DRAWN	ZHIWEI.CHEN	2015.07.07	
CHECKED		TITLE: 1.25mm Crimp Style Connectors	
APPROVALS		PART NO.	GP01-1252WVS-XP
TOLERANCES ARE	30~MAX ±0.30 10~30 ±0.20 5~10 ±0.15 ~ 5 ±0.10	ANGLE	SCALE: 1:1
CHANGE	CHECK	APPRO.	PROJ. SHEET 1 OF 1