


NOTES:
 HOUSING: HIGH TEMPERATURE HOUSING UL94V-0
 WITHSTANDS IR AND VPR SOLDERING METHODS.
 CONTACTS: PHOSPHOR BRONZE.
 PLATING: GOLD PLATED.
 ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 0.3 AMP.
 INSULATOR RESISTANCE: 1000M Ω MIN. AT DC 250V.
 CONTACT RESISTANCE: 90M Ω MAX. AT DC 100MA.
 OPERATING TEMPERATURE: -55C ~ +85C .

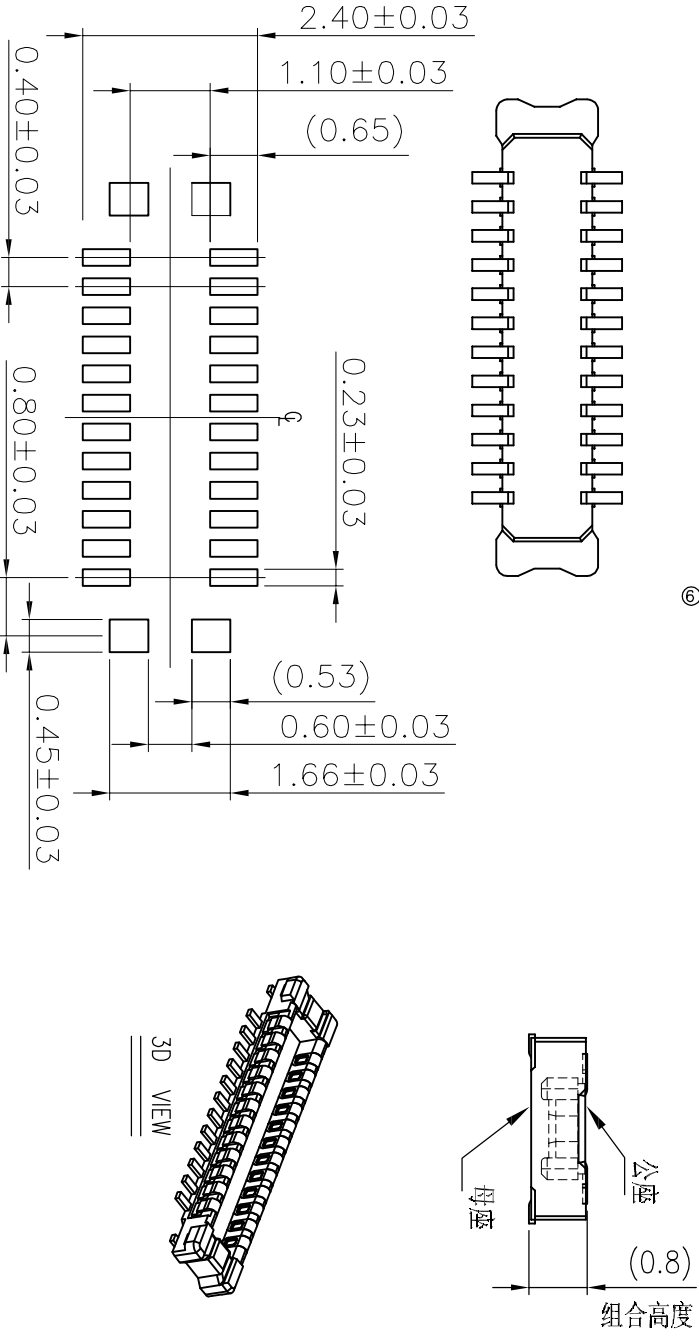

No. of contacts	Dimensions		
	A.	B.	C.
10	3.75	2.50	3.55
24	6.55	5.30	6.35
30	7.75	6.50	7.55
40	9.75	8.50	9.55

RECOMMENDED P.C.BOARD LAYOUT
 Tolerance: ± 0.05

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:	
DRAWN	ZHWEI, CHEN	2015.07.07	0.4mm BTB H0.8MM	
CHECKED				
APPROVALS			PART NO.	GP02-7XX-GXXP-B0R
TOLERANCES ARE	30~ ϕ 1.1 10~30 5~10 ~5	± 0.30 ± 0.20 ± 0.15 ± 0.10	ANGLE	$\pm 2^\circ$
			UNIT:	mm
			SCALE:	1:1
			DRAWING NO.	
			PROJ.	
			SHEET	1 OF 1

