

PERFORMANCE

Electrical Rating: AC/DC 100V

額定電壓電流

0.8A(AWG#36) 0.3A(AWG#40)

●.24A(AWG#42) ●.1A(AWG#44)

Insulation Resistance: 1000M Ω min.



絕緣阻抗

Withstanding Voltage: 250VAC/minute

耐電壓

Temperature Range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

適用領域

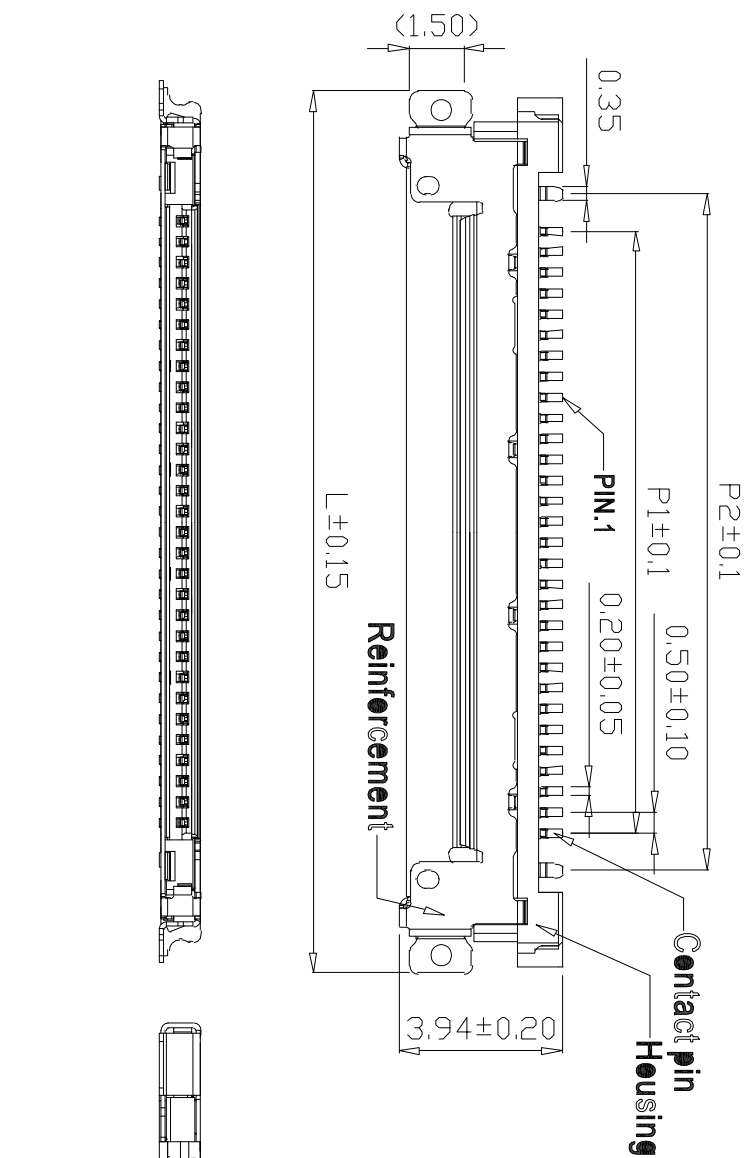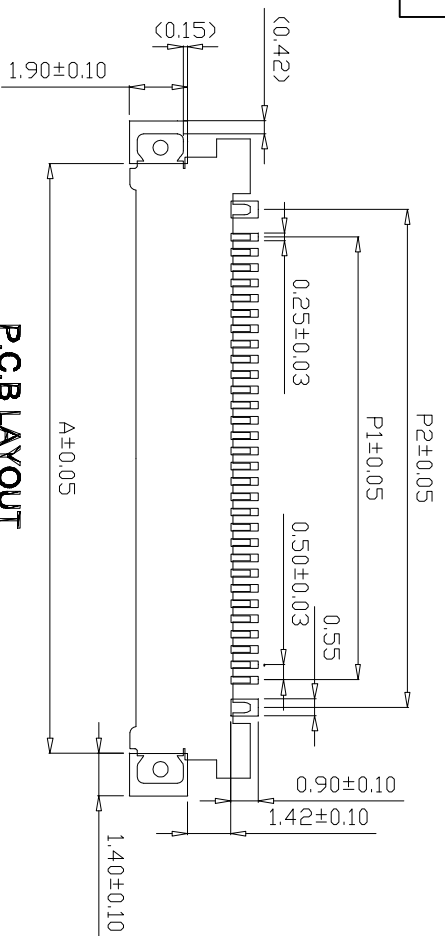

PIN	L	P2	P1	A
30	21.25	16.30	14.50	19.30
40	26.25	21.30	19.50	24.30
50	31.25	26.30	24.50	29.30

Part No.: GP01-0500WRS-NP
產品編號
Material: Housing: LCP 94V-0
材質 塑膠座
Contact Pin: B
接觸針 磷青銅
Shell: Stainless Steel
鐵殼 不銹鋼
Applicable Wire: AWG#36 #40~44
適用電線

[illegible]