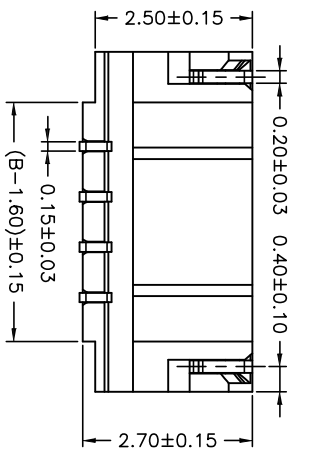
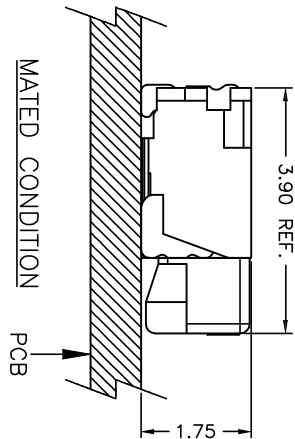
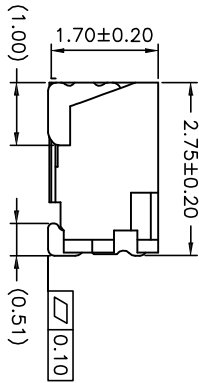
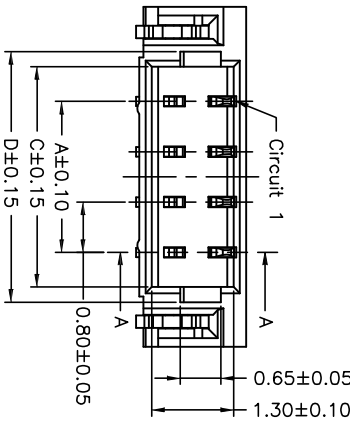

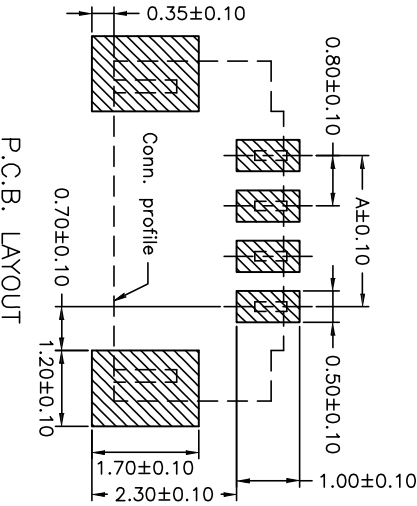



SPECIFICATIONS
Current Rating: 0.5A AC,DC
Voltage Rating: 30V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 200V AC/minute
Pin Material: Phosphor Bronze
Solder Tabs: Phosphor Bronze

Circuit No.	Dimensions			
	A	B	C	D
02P	0.80	3.80	1.90	2.38
03P	1.60	4.60	2.70	3.18
04P	2.40	5.40	3.50	3.98
05P	3.20	6.20	4.30	4.78
06P	4.00	7.00	5.10	5.58
07P	4.80	7.80	5.90	6.38
08P	5.60	8.60	6.70	7.18
10P	7.20	10.20	8.30	8.78
12P	8.80	11.80	9.90	10.38
14P	10.40	13.40	11.50	11.98
15P	11.20	14.20	12.30	12.78
16P	12.00	15.00	13.10	13.58
17P	12.80	15.80	13.90	14.38
18P	13.60	16.60	14.70	15.18
20P	15.20	18.20	16.30	16.78

APPROVALS		DATE	GEPU歌普		
DRAWN	ZHIWEI.CHEN	2015.07.07			
CHECKED					
APPROVALS					
TOLERANCES ARE		ANGLE	PART NO.	SCALE: 1:1	
30~0.15		±0.30	GP01-0800WRS-NP	PROJ	
10~0.30		±0.20			
5~10		±0.15	UNIT: mm	SHEET 1 OF 1	
~ 5		±0.10	DRAWING NO.		
ECN NO.	REV.	DATE.	DESCRIPTION.		
	A		NEW		
			CHANGE.		
			CHECK.		
			APPRO.		