



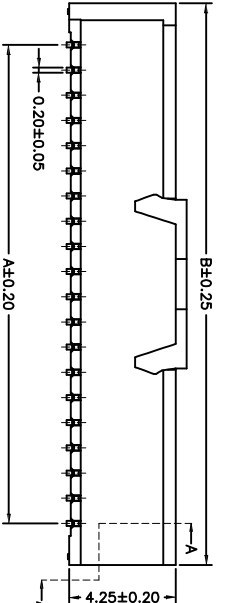



SPECIFICATIONS
Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze
Solder Tabs: Brass
Cap: LCP,UL94V-0,Natural(Beige)

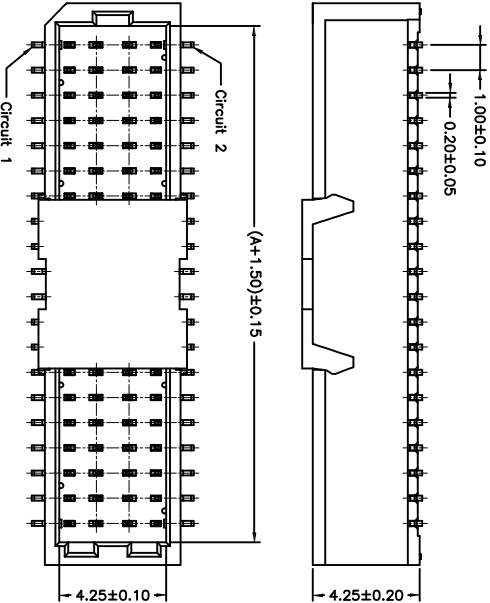

Circuit No.	Dimensions	
	A	B
2X05P	4.00	7.30
2X06P	5.00	8.30
2X08P	7.00	10.30
2X10P	9.00	12.30
2X15P	14.00	17.30
2X20P	19.00	22.30
2X25P	24.00	27.30

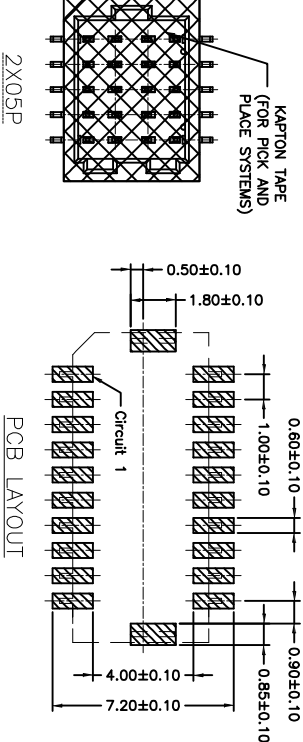

APPROVALS		DATE	
DRAWN	ZHIWEI.CHEN	2015.07.07	
CHECKED		TITLE:	
APPROVALS		PART NO.	
TOLERANCES ARE		30~0.15 10~0.30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10
		ANGLE	±2°
		UNIT: mm	SCALE: 1:1
		DRAWING NO.	SHEET 1 OF 1

NEW

DESCRIPTION.

CHANGE.

CHECK.

APPRO.

ECN NO.

REV.

DATE.

2X05P

KAPTON TAPE (FOR PICK AND PLACE SYSTEMS)

PCB LAYOUT

GEPU 歌普

GP01-1001WVS-2XNP

PROJ