
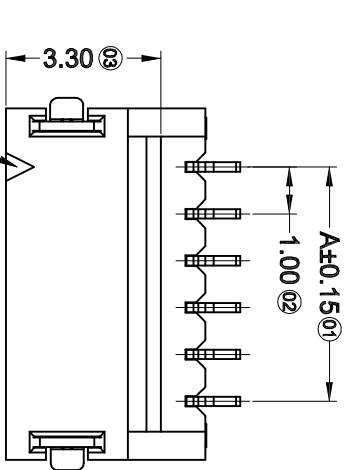
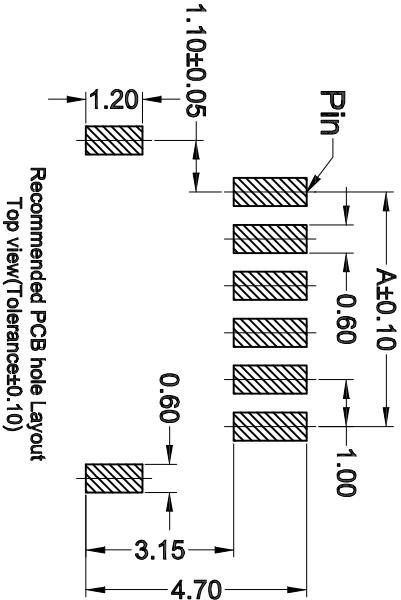


- Specifications :
- Voltage rating: 125V AC / DC
 - Current rating: 1A AC / DC
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance:≥100MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing: ≤40mΩ

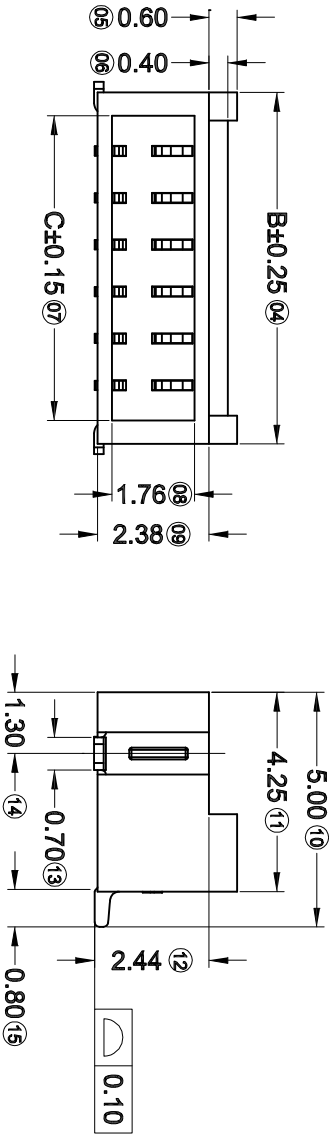

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.00	3.50	2.50	10	9.00	11.50	10.50
03	2.00	4.50	3.50	11	10.00	12.50	11.50
04	3.00	5.50	4.50	12	11.00	13.50	12.50
05	4.00	6.50	5.50	13	12.00	14.50	13.50
06	5.00	7.50	6.50	14	13.00	15.50	14.50
07	6.00	8.50	7.50	15	14.00	16.50	15.50
08	7.00	9.50	8.50	16	15.00	17.50	16.50
09	8.00	10.50	9.50				

APPROVALS		DATE	
DRAWN	ZHIWEI.CHEN	2015.07.07	
CHECKED		TITLE:	
APPROVALS		PART NO.	GP01-1002WRS-NP
TOLERANCES ARE		30~0.15 10~0.30 5~0.10	±0.30 ±0.20 ±0.15
		ANGLE	±2°
		UNIT: mm	SCALE: 1:1
		DRAWING NO.	
			PROJ. 1 OF 1

GEPU 歌普

1.00mm Crimp Style Connector

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			