
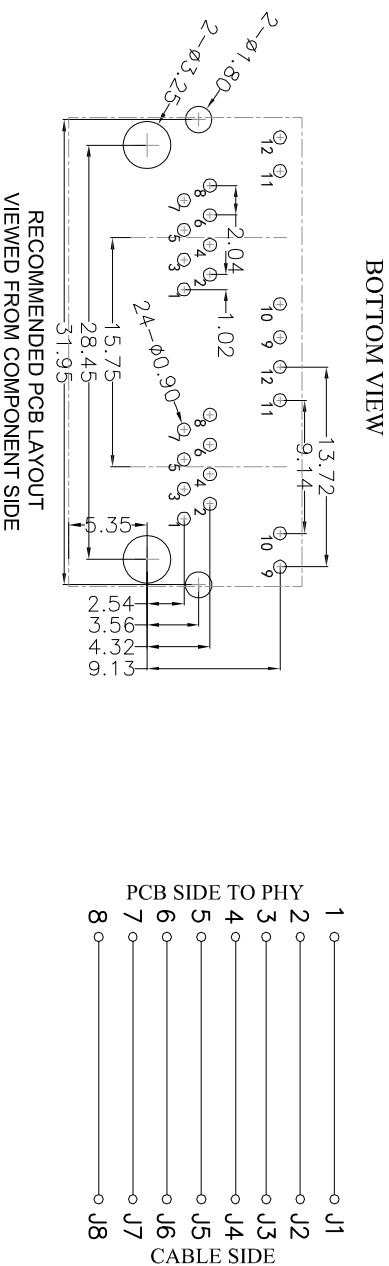
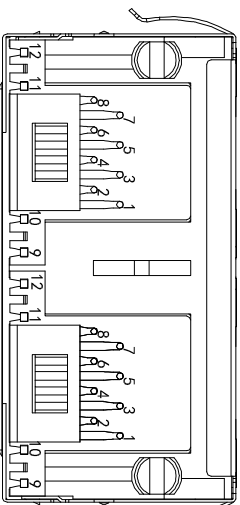


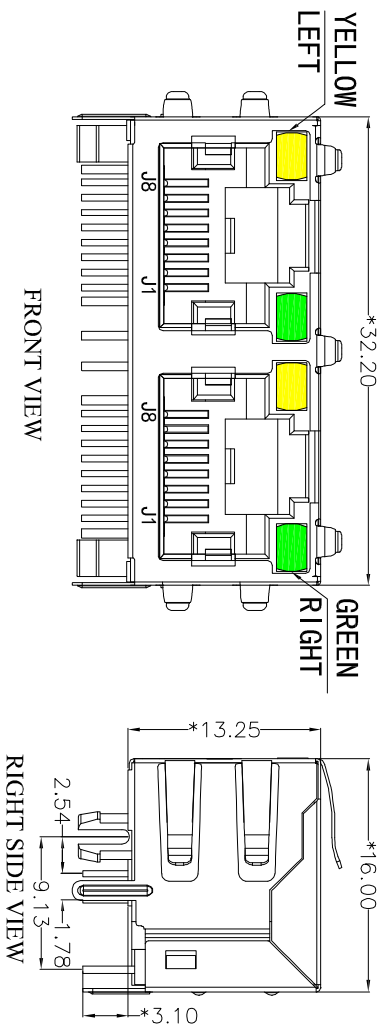


MATERIAL:
HOUSING: PA46, UL94V-0, BLACK.
TERMINAL: PHOSPHOR BRONZE $\phi=0.46\text{MM}$, G/FU" GOLD PLATING.
SHIELD: C2680, $1\pm0.20\text{MM}$, 20 MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:
DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 77KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
STORAGE TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
ALL CRITICAL DIMENSIONS WITH "*"

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING: 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ, 1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

LED Specification

Standard LED Color	LED Wavelength	Forward(I)	Forward(V)
Green	569nm	20mA	1.6-2.6V
Yellow	589nm	20mA	1.6-2.6V

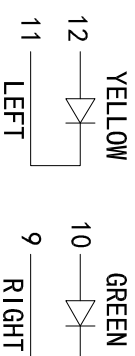

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE: R/J45 1*2 带屏蔽带灯			
DRAWN	ZHIWEI.CHEN	2020.09.07				
CHECKED						
APPROVALS			PART NO.	R/J45-6W12-DDY6-AA-88-B1	SCALE: 1:1	PROJ. 1 OF 1
TOLERANCES ARE	30~0.15 10~0.30 5~0.10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	±2°	DRAWING NO.	