

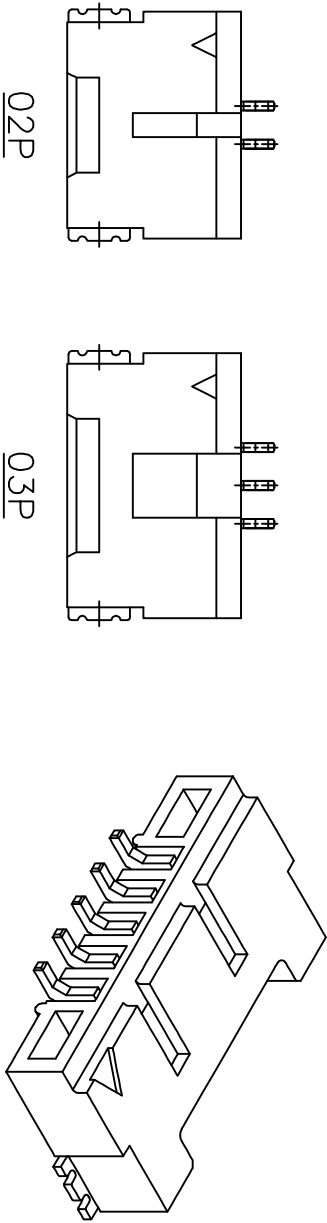



02P




03P

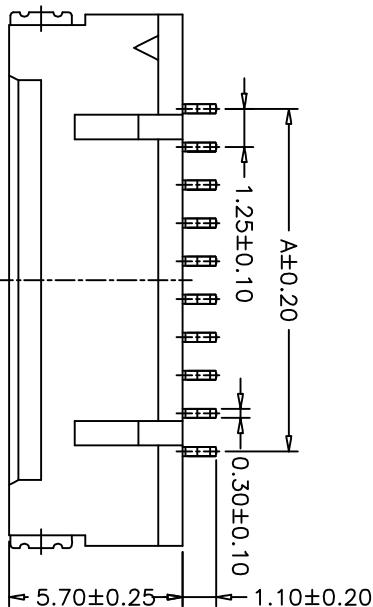

04P~30P

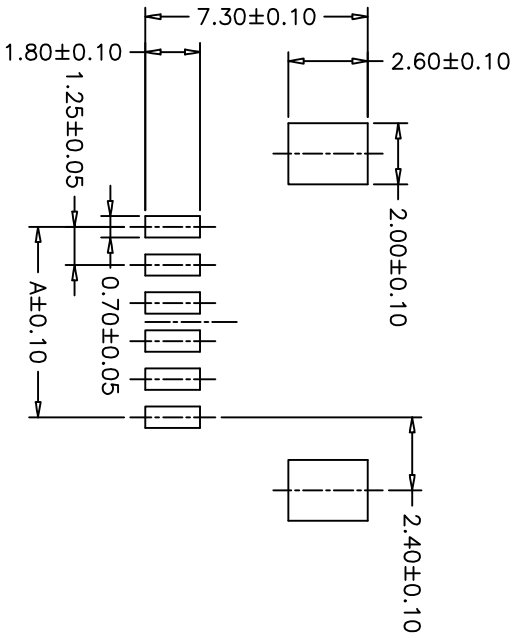

P.C.B. LAYOUT

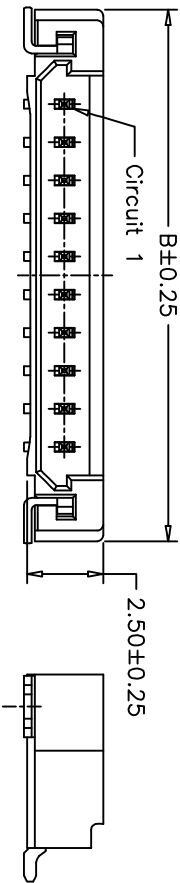

SPECIFICATIONS
Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Solder Tabs: Brass/Tin-plated
Material: Nylon 6T,UL94V-0
Color: Natural(Beige)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
1254WR-S-02P	1.25	7.45
1254WR-S-03P	2.50	8.70
1254WR-S-04P	3.75	9.95
1254WR-S-05P	5.00	11.20
1254WR-S-06P	6.25	12.45
1254WR-S-07P	7.50	13.70
1254WR-S-08P	8.75	14.95
1254WR-S-09P	10.00	16.20
1254WR-S-10P	11.25	17.45
1254WR-S-11P	12.50	18.70
1254WR-S-12P	13.75	19.95
1254WR-S-13P	15.00	21.20
1254WR-S-14P	16.25	22.45
1254WR-S-15P	17.50	23.70
1254WR-S-20P	23.75	29.95
1254WR-S-21P	25.00	31.20
1254WR-S-25P	30.00	36.20
1254WR-S-30P	36.25	42.45

APPROVALS		DATE	GEPU歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07		
CHECKED				
APPROVALS			TITLE:	
TOLERANCES ARE			PART NO.	GP01-1254WRS-NP
30~0.15	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
10~30	±0.20			PROJ.
5~10	±0.15	±2°	DRAWING NO.	SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.	
	A		NEW	