




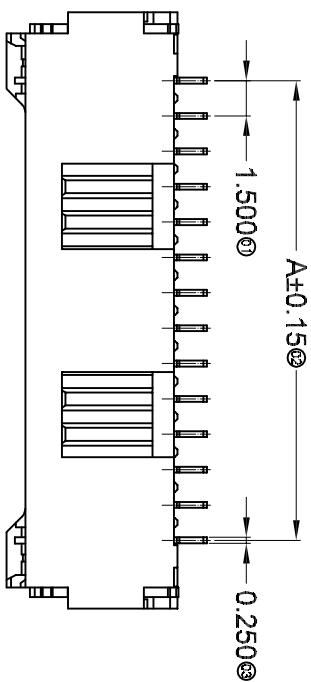


06P-15P Double Hole
Scale 1:1

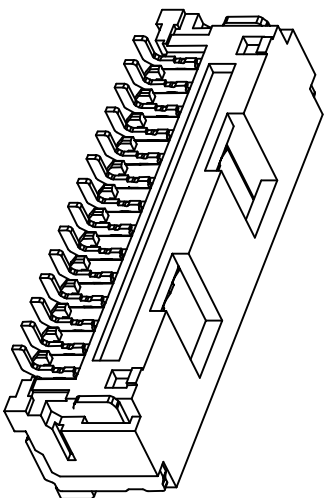


■ Specifications :


- Voltage rating: 100V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+85°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ

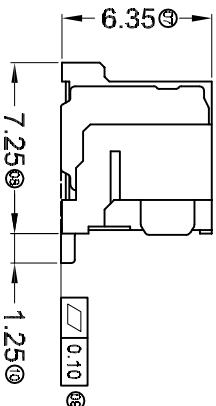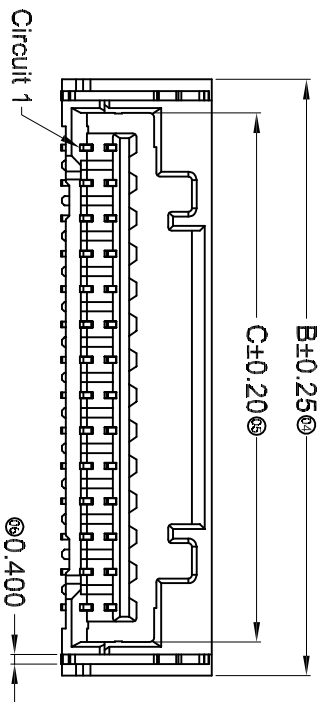

Category: W-wafer
Welding Board Angle: R- Right angle 90°
Welding Way: S-SMT
Row No.-Pin No.: XX-02P~15P
Plug the Pin & Special No.:
Material: LP-LCP 94V-0;
Plating Category: SW- Matte Tin Plating
Color: Blank-Natural Color

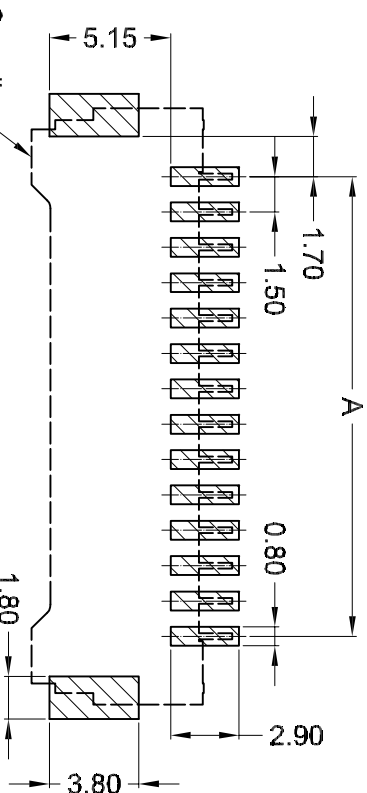

Recommended P.C.B Layout
General Tolerance±0.05

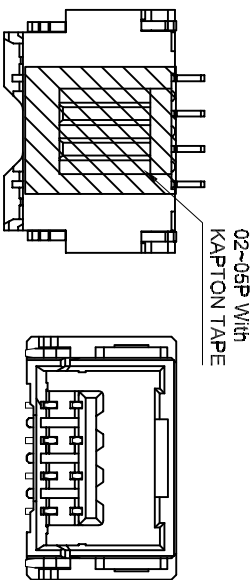

02P-05P Single Hole
Scale 1:1

Poles	Dimensions (mm)		
	A	B	C
02	1.50	7.30	4.45
03	3.00	8.80	5.95
04	4.50	10.30	7.45
05	6.00	11.80	8.95
06	7.50	13.30	10.45
07	9.00	14.80	11.95
08	10.50	16.30	13.45
09	12.00	17.80	14.95
10	13.50	19.30	16.45
11	15.00	20.80	17.95
12	16.50	22.30	19.45
13	18.00	23.80	20.95
14	19.50	25.30	22.45
15	21.00	26.80	23.95

APPROVALS		DATE		GEPU 歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07					
CHECKED							
APPROVALS							
TOLERANCES ARE		30~0.15	±0.30	ANGLE	PART NO.	GP01-1515WRS-NP	
		10~30	±0.20		UNIT: mm	SCALE: 1:1	
		5~10	±0.15	±2°	DRAWING NO.	PROJ. 1 OF 1	
ECN NO.	REV.	DATE.	DESCRIPTION.		CHANGE.	CHECK.	APPRO.
	A		NEW				