

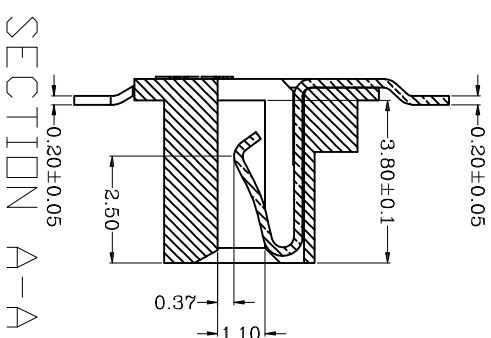
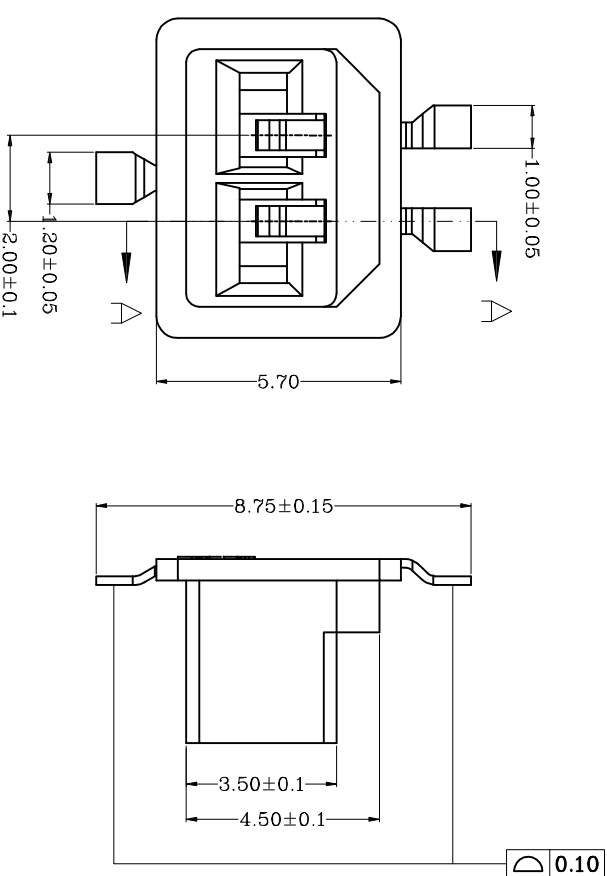
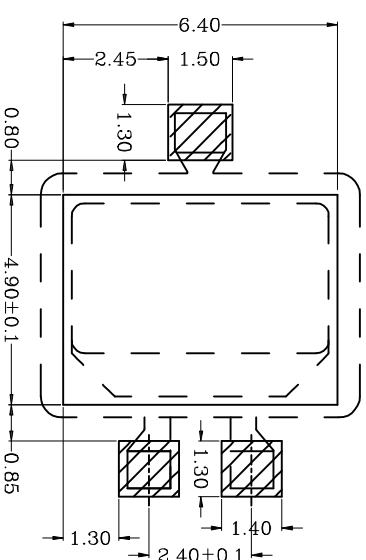





- SPECIFICATION**
- 1 Contact resistance: $\leq 20m\Omega$
 - 2 Insulation resistance: $\geq 1000M\Omega$
 - 3 Rated voltage: 150 V AC DC
 - 4 Rated current: 1.0 A AC DC
 - 5 Withstand Voltage: 1000V AC/minute
 - 6 Temperature Range: -25℃ ~ +105℃

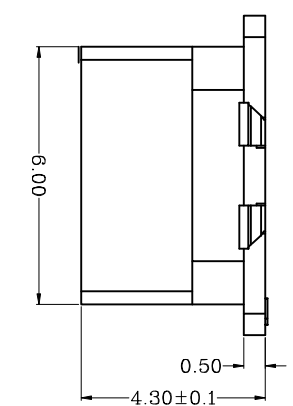

PCB LAYOUT

APPROVALS		DATE	GEPU 歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07				
CHECKED						
APPROVALS						
TOLERANCES ARE		30~80μm ±0.30	ANGLE	PART NO.	GP01-2001M-02	PROJ. 100%
		10~30 ±0.20		UNIT: mm	SCALE: 1:1	
		5~10 ±0.15	±2°	DRAWING NO.		SHEET 1 OF 1
		~ 5 ±0.10				
ECN NO.	REV.	DATE.				
	A		NEW			
DESCRIPTION.						
CHANGE.						
CHECK.						
APPRO.						