



技术参数 (SPECIFICATIONS)

- 额定电压: 250V AC DC
- Voltage rating:250V AC DC
- 额定电流: 3.0A AC DC #22
- Current rating:3.0A AC DC #22
- 耐压值: 1000V AC/minute
- Withstand voltage:1000V AC/minute
- 绝缘电阻: 1000MΩ MIN
- Insulation resistance:1000MΩ MIN
- 接触电阻: 0.02Ω MAX
- Contact resistance:0.02Ω MAX
- 工作温度: -25℃~+85℃
- Working Temperature:-25℃~+85℃
- 间距: 2.5mm
- Pitch:2.5mm
- 材料 (MATERIAL)
- 绝缘体: 尼龙9T UL94V-0
- Insulator:PA9T UL94V-0
- 接触针: 黄铜
- Contact Pin: Brass
- 焊片: 黄铜
- Solder tab:Brass

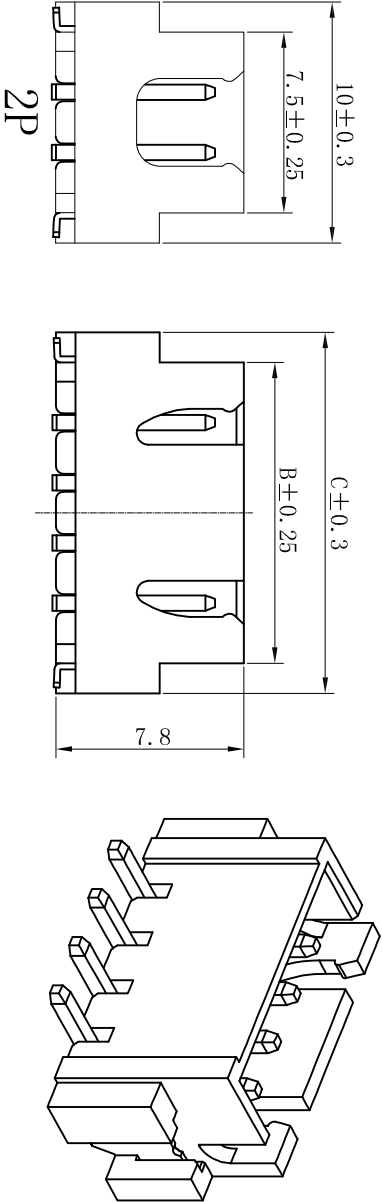

poles	A	B	C
2P	2.5	7.5	10.0
3P	5.0	10.0	12.5
4P	7.5	12.5	15.0
5P	10.0	15.0	17.5
6P	12.5	17.5	20.0
7P	15.0	20.0	22.5
8P	17.5	22.5	25.0
9P	20.0	25.0	27.5
10P	22.5	27.5	30.0
11P	25.0	30.0	32.5
12P	27.5	32.5	35.0
13P	30.0	35.0	37.5
14P	32.5	37.5	40.0
15P	35.0	40.0	42.5
16P	37.5	42.5	45.0

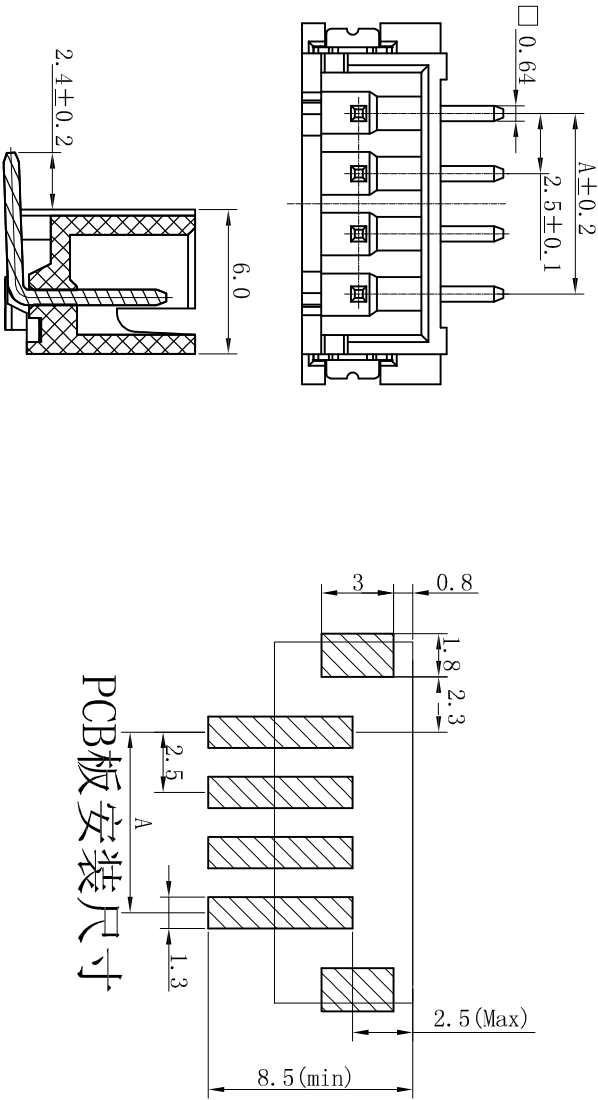

PCB板安装尺寸

APPROVALS		DATE	
DRAWN	ZHIWEI.CHEN	2015.07.07	
CHECKED		TITLE:	
APPROVALS		PART NO.	
TOLERANCES ARE		SCALE: 1:1	
30~0.1		PROJ	
10~0.30		SHEET 1 OF 1	
5~0.20			
~ 5			
±0.30			
±0.20			
±0.15			
±0.10			
±2°			
DRAWING NO.			

ECN NO.	REV.	DATE.	DESCRIPTION.
	A		NEW