

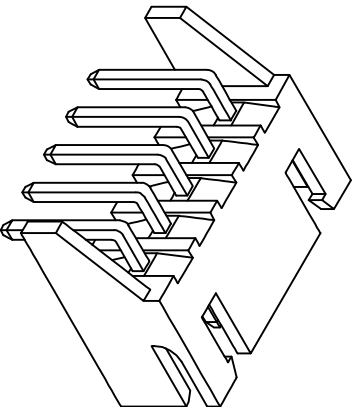
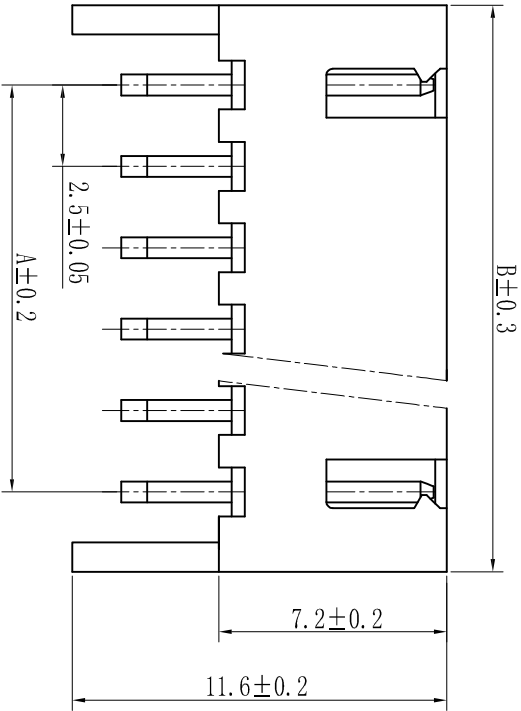
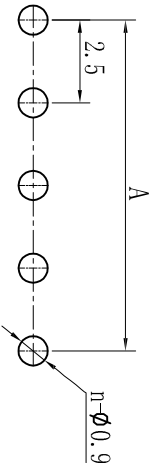


poles	A	B
2P	2.5	7.5
3P	5.0	10.0
4P	7.5	12.5
5P	10.0	15.0
6P	12.5	17.5
7P	15.0	20.0
8P	17.5	22.5
9P	20.0	25.0
10P	22.5	27.5
11P	25.0	30.0
12P	27.5	32.5
13P	30.0	35.0
14P	32.5	37.5
15P	35.0	40.0

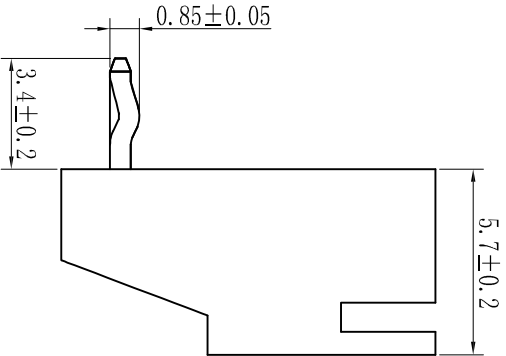

技术参数 (SPECIFICATIONS)

- 额定电压: 250V AC DC
 - Voltage rating:250V AC DC
 - 额定电流: 3.0A AC DC #22
 - Current rating:3.0A AC DC #22
 - 耐压值: 1000V AC/minute
 - Withstand voltage:1000V AC/minute
 - 绝缘电阻: 1000MΩ MIN
 - Insulation resistance:1000MΩ MIN
 - 接触电阻: 0.02Ω MAX
 - Contact resistance:0.02Ω MAX
 - 工作温度: -25℃~+85℃
 - Working Temperature:-25℃~+85℃
 - 间距: 2.5mm
 - Pitch:2.5mm
- 材料 (MATERIAL)
- 外壳: 尼龙66
 - Housing: PA66
 - 插针: 黄铜
 - Pin: Brass

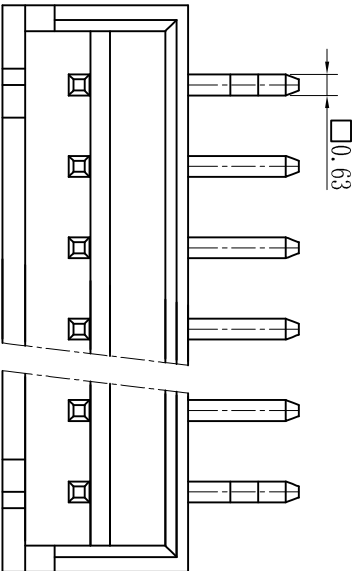

PCB LAYOUT

APPROVALS		DATE		GEPU歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07					
CHECKED							
APPROVALS							
TOLERANCES ARE		30~0.1	±0.30	ANGLE	PART NO.	GP01-2501WR-NP-L	
10~30		±0.20			UNIT: mm	SCALE: 1:1	PROJ
5~10		±0.15		±2°	DRAWING NO.		SHEET 1 OF 1
~ 5		±0.10					
ECN NO.		REV.	DATE.	DESCRIPTION.			
NEW							
CHANGE.		CHECK.	APPRO.				