

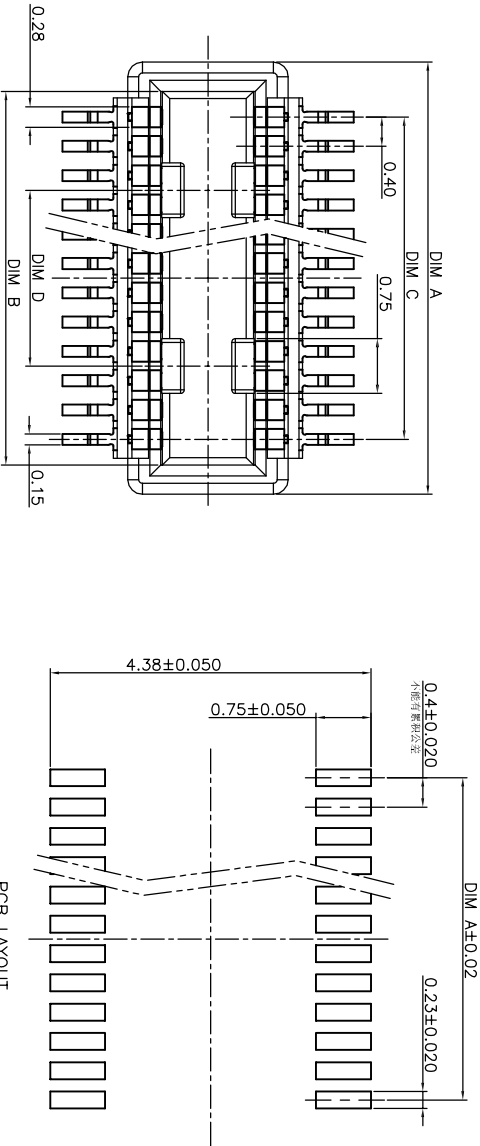
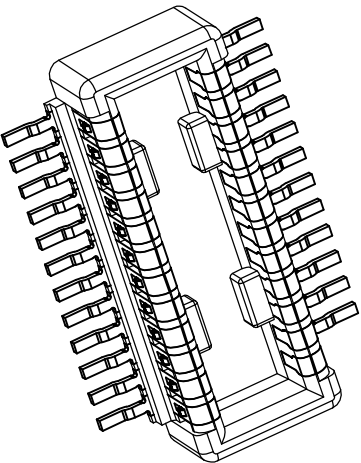


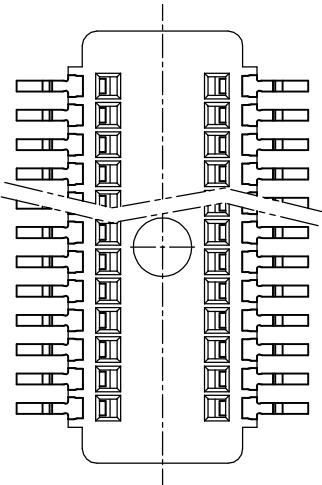

NOTES:

HOUSING: HIGH TEMPERATURE HOUSING UL94V-0
WITHSTANDS IR AND VPR SOLDERING METHODS.
CONTACTS: PHOSPHOR BRONZE.
PLATING: GOLD PLATED.
ELECTRICAL CHARACTERISTICS:
CURRENT RATING:0.3 AMP.
INSULATOR RESISTANCE:1000M Ω MIN. AT DC 250V.
CONTACT RESISTANCE:90M Ω MAX. AT DC 100MA.
OPERATING TEMPERATURE:-55 $^{\circ}$ C ~+85 $^{\circ}$ C .

60	13.10	12.30	11.60	9.60
50	11.10	10.30	9.60	7.60
40	9.10	8.30	7.60	5.60
34	7.90	7.10	6.40	4.40
30	7.10	6.30	5.60	3.60
24	5.90	5.10	4.40	2.40
20	5.10	4.30	3.60	1.60
Pin No.	DIM A	DIM B	DIM C	DIM D

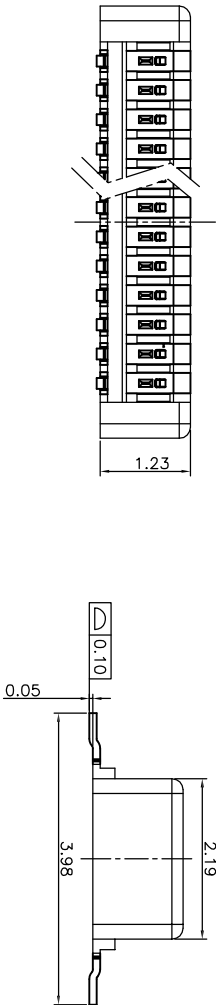

APPROVALS		DATE	GEPU 歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07	TITLE:	0.4mm BTB H1.5mm		
CHECKED			PART NO.	GP02-8XX-GXXP-B0R		
APPROVALS			UNIT: mm	SCALE: 1:1	PROJ	
TOLERANCES ARE	30~0.15 10~0.30 5~10	±0.30 ±0.20 ±0.15	ANGLE	±2 $^{\circ}$	DRAWING NO.	SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			