
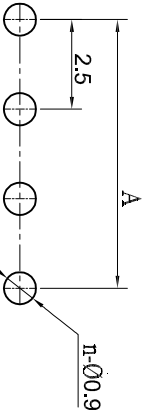
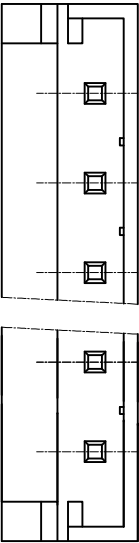
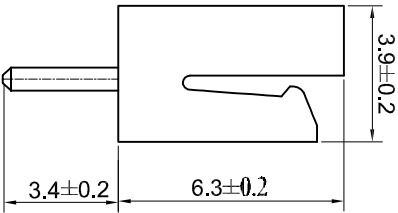


POLES	DIMENSIONS(mm)	
	A	B
2	2.5	7.5
3	5.0	10.0
4	7.5	12.5
5	10.0	15.0
6	12.5	17.5
7	15.0	20.0
8	17.5	22.5
9	20.0	25.0
10	22.5	27.5
11	25.0	30.0
12	27.5	32.5
13	30.0	35.0
14	32.5	37.5
15	35.0	40.0

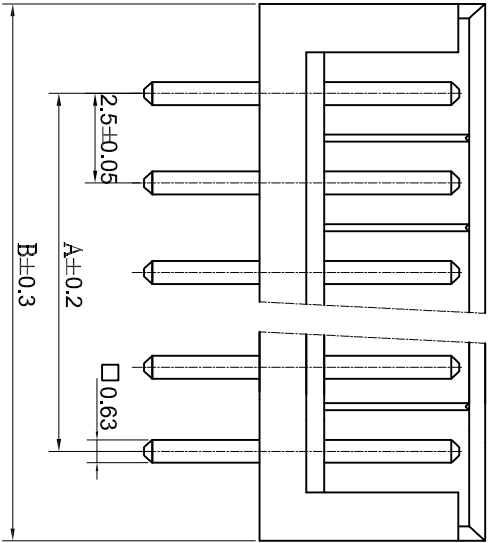

PCB 安装尺寸图

■ 技术参数 (SPECIFICATIONS)

- ◆ 额定电压: 250V AC/DC
- ◆ Voltage rating: 250V AC/DC
- ◆ 额定电流: 3.0A AC/DC MAX
- ◆ Current rating: 3.0A AC/DC MAX
- ◆ 耐压值: 800V AC/minute
- ◆ Withstand voltage: 800V AC/minute
- ◆ 绝缘电阻: 1000MΩ MIN
- ◆ Insulation resistance: 1000MΩ MIN
- ◆ 接触电阻: 0.02Ω MAX
- ◆ Contact resistance: 0.02Ω MAX
- ◆ 工作温度: -25°C ~+85°C
- ◆ Working Temperature: -25°C ~+85°C
- ◆ 间距: 2.5 mm
- ◆ Pitch: 2.5 mm

■ 材料 (MATERIAL)

- ◆ 基座: 尼龙66
- ◆ Water: Nylon66
- ◆ 插针: 黄铜
- ◆ Pin: Brass

				APPROVALS		DATE		GEPU歌普					
				DRAWN		ZHIWEI.CHEN		2015.07.07					
				CHECKED						TITLE:			
				APPROVALS						PART NO. GP01-2502WV-NP			