
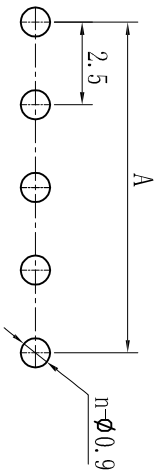
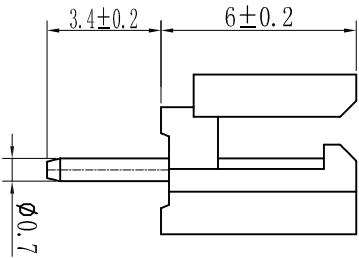
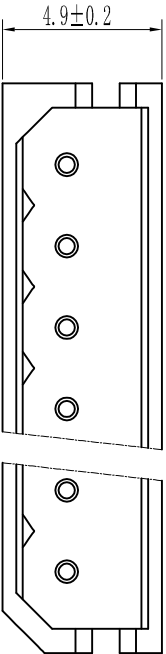
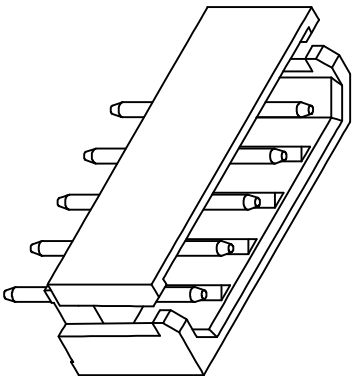


PARTNO	A	B
2P	2.5	7.4
3P	5.0	9.9
4P	7.5	12.4
5P	10.0	14.9
6P	12.5	17.4
7P	15.0	19.9
8P	17.5	22.4
9P	20.0	24.9
10P	22.5	27.4
11P	25.0	29.9
12P	27.5	32.4
13P	30.0	34.9
14P	32.5	37.4
15P	35.0	39.9

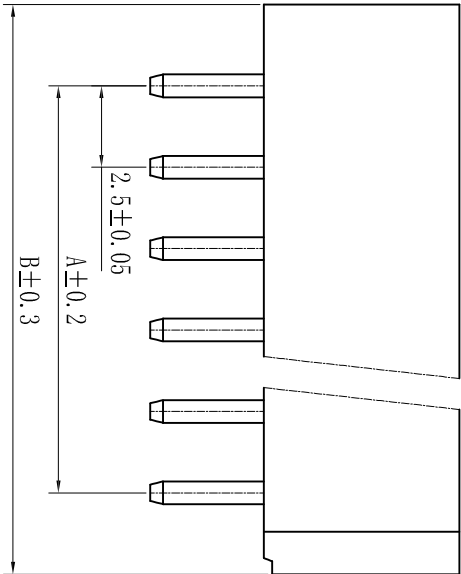

PCB LAYOUT

技术参数 (SPECIFICATIONS)

- 额定电压: 250V AC DC
- Voltage rating: 250V AC DC
- 额定电流: 2.0A AC DC MIN
- Current rating: 2.0A AC DC MIN
- 耐压值: 800V AC/minute
- Withstand voltage: 800V AC/minute
- 绝缘电阻: 1000MΩ MIN
- Insulation resistance: 1000MΩ MIN
- 接触电阻: 0.02Ω MAX
- Contact resistance: 0.02Ω MAX
- 工作温度: -25℃ ~ +85℃
- Working Temperature: -25℃ ~ +85℃
- 间距: 2.5mm
- Pitch: 2.5mm
- 材料 (MATERIAL)
- 外壳: 尼龙66
- Housing: PA66
- 插针: 黄铜
- Pin: Brass

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07		
CHECKED			PART NO.	
APPROVALS				
TOLERANCES ARE			UNIT: mm	SCALE: 1:1
				PROJ.
				SHEET 1 OF 1

APPROVALS

DATE

DRAWN

ZHIWEI.CHEN

2015.07.07

CHECKED

APPROVALS

TOLERANCES ARE

30~0.1

10~0.30

5~10

~5

±0.30

±0.20

±0.15

±0.10

ANGLE

±2°

PART NO.

GP01-2506WV-NP

UNIT: mm

SCALE: 1:1

PROJ.

SHEET

1 OF 1

NEW

DESCRIPTION.

CHANGE.

CHECK.

APPRO.

ECN NO.

REV.

DATE.