
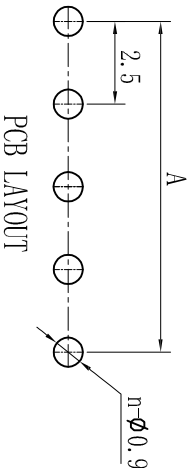
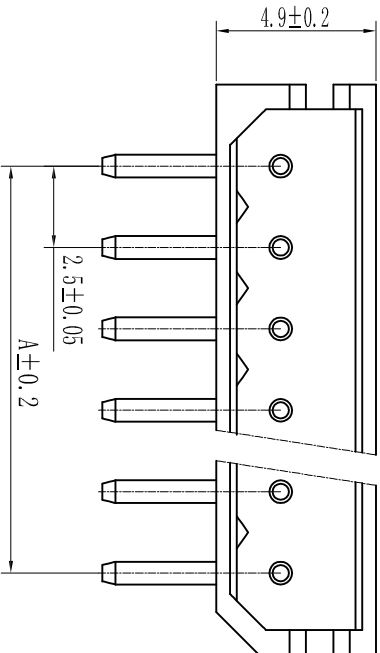
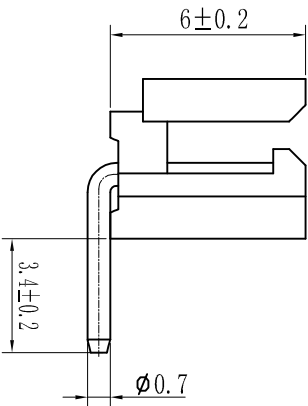


PARTNO	A	B
2P	2.5	7.4
3P	5.0	9.9
4P	7.5	12.4
5P	10.0	14.9
6P	12.5	17.4
7P	15.0	19.9
8P	17.5	22.4
9P	20.0	24.9
10P	22.5	27.4
11P	25.0	29.9
12P	27.5	32.4
13P	30.0	34.9
14P	32.5	37.4
15P	35.0	39.9

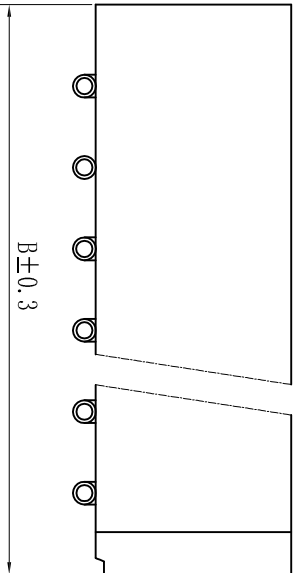

技术参数 (SPECIFICATIONS)

额定电压: 250V AC DC

Voltage rating:250V AC DC

额定电流: 2.0A AC DC MIN

Current rating:2.0A AC DC MIN

耐压值: 800V AC/minute

Withstand voltage:800V AC/minute

绝缘电阻: 1000MΩ MIN

Insulation resistance:1000MΩ MIN

接触电阻: 0.02Ω MAX

Contact resistance:0.02Ω MAX

工作温度: -25℃~+85℃

Working Temperature:-25℃~+85℃

间距: 2.5mm

Pitch:2.5mm

材料 (MATERIAL)

外壳: 尼龙66

Housing:PA66

插针: 黄铜

Pin: Brass

				APPROVALS		DATE		GEPU歌普					
				DRAWN		ZHIWEI.CHEN		2015.07.07					
				CHECKED						TITLE:			
				APPROVALS						PART NO. GP01-2506WR-NP			