

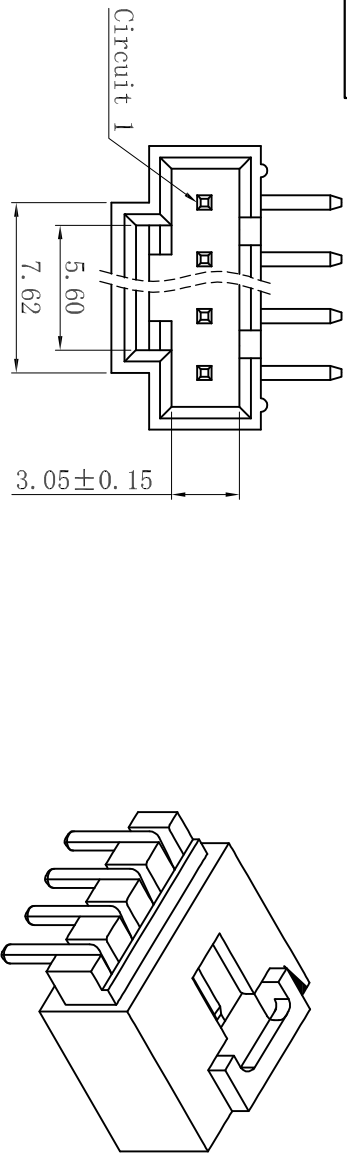



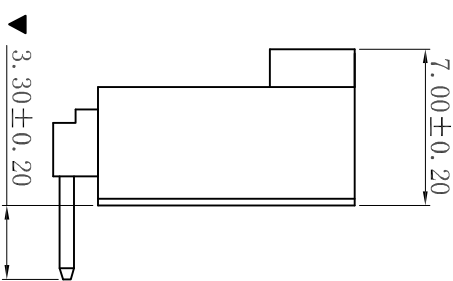





- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance:1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max

■ WAFER

- Poles : 02-20P
- Housing Material: PA66 15%GF UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Gold-Flash
- The Dimension Marked “▼” Must Be Recorded

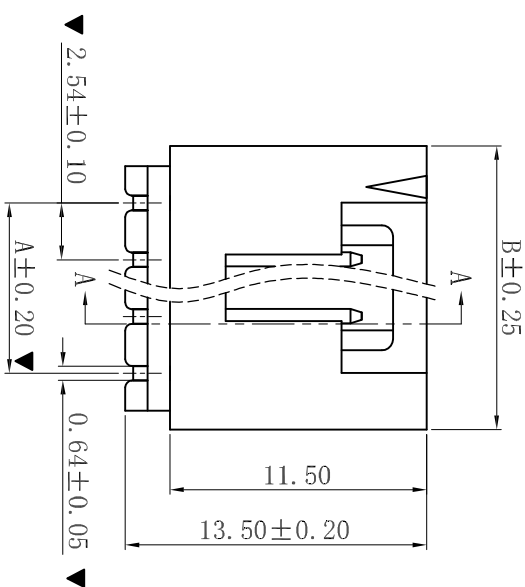

SECTION: A-A



Poles	Dimension (mm)	
	A	B
02	2.54	7.62
03	5.08	10.1
04	7.62	12.7
05	10.16	15.2
06	12.70	17.7
07	15.24	20.3
08	17.78	22.8
09	20.32	25.4
10	22.86	27.9
11	25.40	30.4
12	27.94	33.0
13	30.48	35.5
14	33.02	38.1
15	35.56	40.6
16	38.10	43.1
17	40.64	45.7
18	43.18	48.2
19	45.72	50.8
20	48.26	53.3

APPROVALS		DATE		GEPU歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07			
CHECKED					
APPROVALS					
TOLERANCES ARE		30~0.15	±0.30	ANGLE	PART NO.
10~30		±0.20			GP01-2542WR-NP
5~10		±0.15			
~ 5		±0.10		±2°	
DRAWING NO.		SCALE: 1:1		PROJ	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			