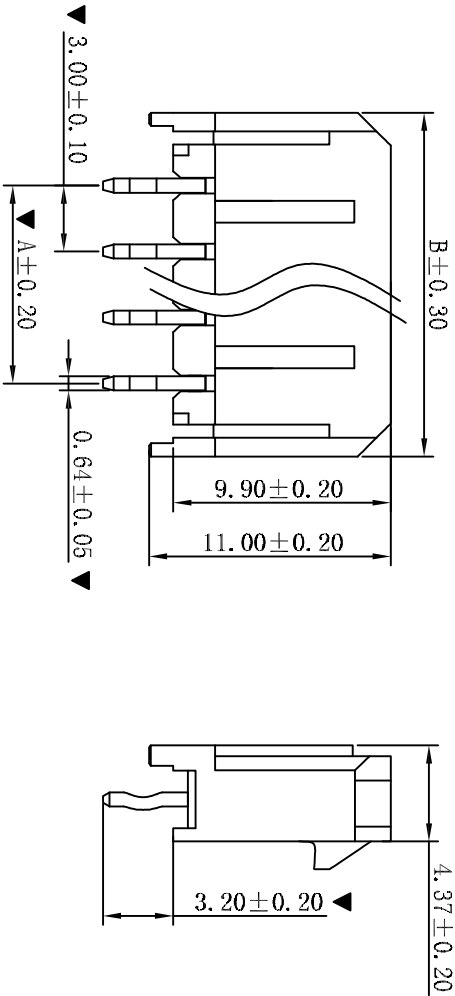

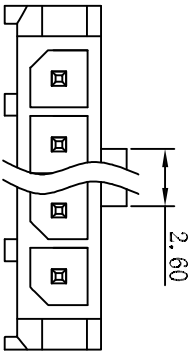



P.C.B. LAYOUT

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

WAFER

- Part No. : 3045WV-1xNP
- Poles : 02-12P
- Housing Material:Nylon66 15%GF UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

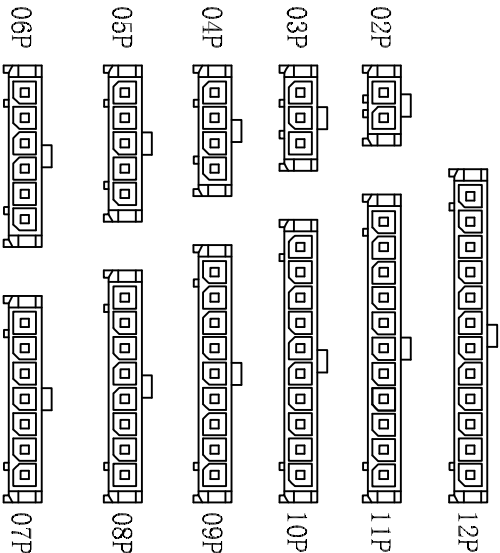

PART NO.	Dimensions (mm)	
	A	B
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

CIRCUIT SIZE LAYOUT

APPROVALS		DATE		TITLE: GEPU 歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07			
CHECKED					
APPROVALS				PART NO. GP01-3045WV-NP	
TOLERANCES ARE		30 ^{±0.15} 10~30 ^{±0.20} 5~10 ^{±0.15} ~5 ^{±0.10}	ANGLE ±2°	UNIT: mm	SCALE: 1:1
DRAWING NO.				SHEET 1 OF 1	

ECN NO.

REV.

DATE.

DESCRIPTION.

CHANGE.

CHECK.

APPRO.

NEW