

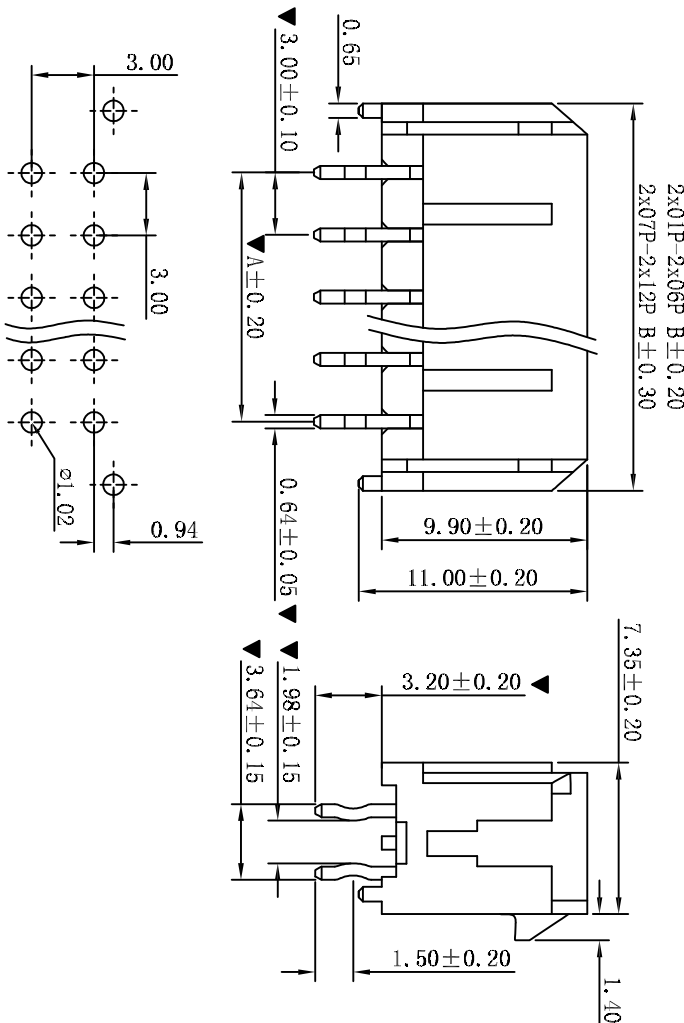


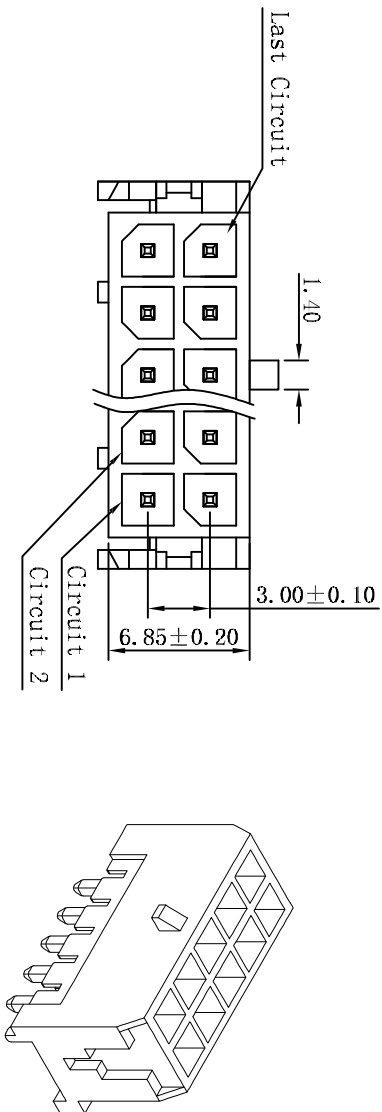

P.C.B. LAYOUT

- SPECIFICATIONS
 - Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance:1000M Ω min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20m Ω max
- WAFER
 - Part No. : 3045WV-2xNP
 - Poles : 02-24P
 - Housing Material:Nylon66 15%GF UL94V-0 Black
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

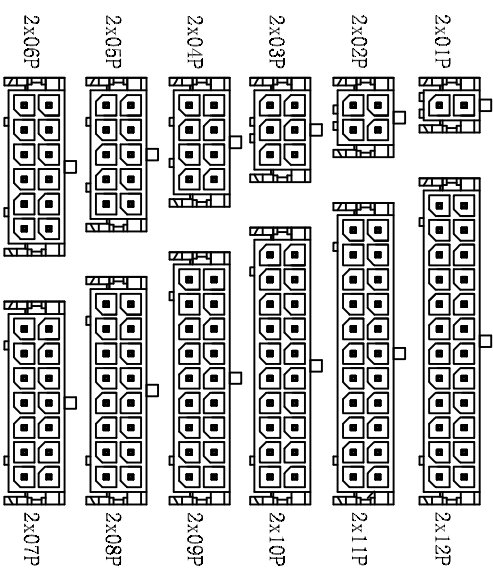

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)	
	A	B
02	---	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

APPROVALS		DATE		TITLE:	
DRAWN		ZHIWEI.CHEN			
CHECKED					
APPROVALS				PART NO.	
TOLERANCES ARE		30~0.15 10~0.30 5~10		ANGLE	
ECN NO.		REV.		DATE.	
NEW		CHANGE.		CHECK.	
DESCRIPTION.		APPRO.		SHEET 1 OF 1	

GEPU歌普

GP01-3045WV-2*NP