**ROHS**

www.gepu.tw






## ■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

## ■ WAFER

- Part No.: 3045WR-1xNP
- Poles : 02-12P
- Housing Material:Nylon66 15%GF UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked "▼" Must Be Recorded

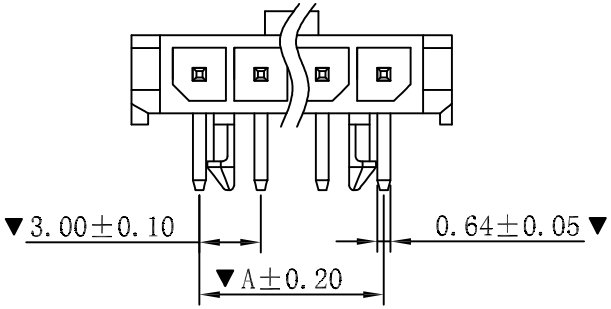








P.C.B.LAYOUT 04P-12P

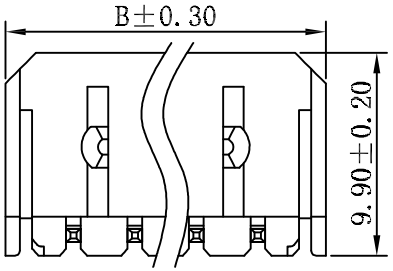


PCB.LAYOUT:3 CKT

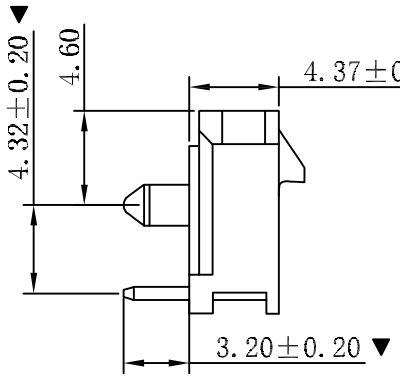


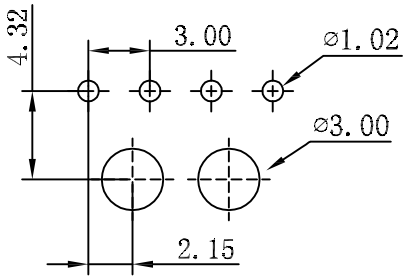PCB.LAYOUT:2 CKT




CIRCUIT SIZE LAYOUT

| PART NO. | Dimensions (mm) A | Dimensions (mm) B |
|---|---|---|
| 02 | 3.00 | 9.65 |
| 03 | 6.00 | 12.65 |
| 04 | 9.00 | 15.65 |
| 05 | 12.00 | 18.65 |
| 06 | 15.00 | 21.65 |
| 07 | 18.00 | 24.65 |
| 08 | 21.00 | 27.65 |
| 09 | 24.00 | 30.65 |
| 10 | 27.00 | 33.65 |
| 11 | 30.00 | 36.65 |
| 12 | 33.00 | 39.65 |

| ECN NO. | REV. | DATE. | DESCRIPTION. | CHANGE. | CHECK. | APPRO. |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | | | | | |
| ——— | A | ——— | NEW | ——— | ——— | ——— |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | ZHIWEI.CHEN | 2015.07.07 |
| CHECKED | | |
| APPROVALS | | |

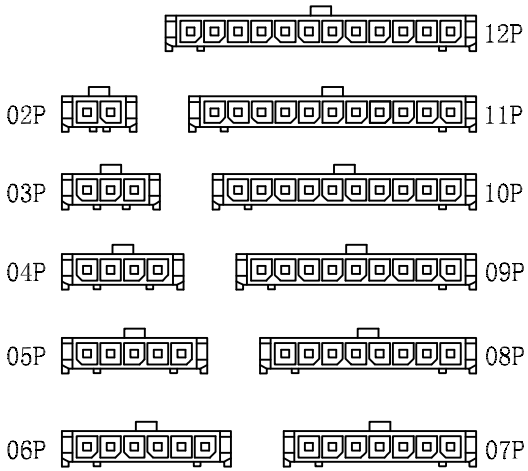TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~ 5 ±0.10; ANGLE ±2°

GEPU 歌普

TITLE:

PART NO. GP01-3045WR-NP

UNIT: mm | SCALE: 1:1 | PROJ:

DRAWING NO. ——— | SHEET 1 OF 1