
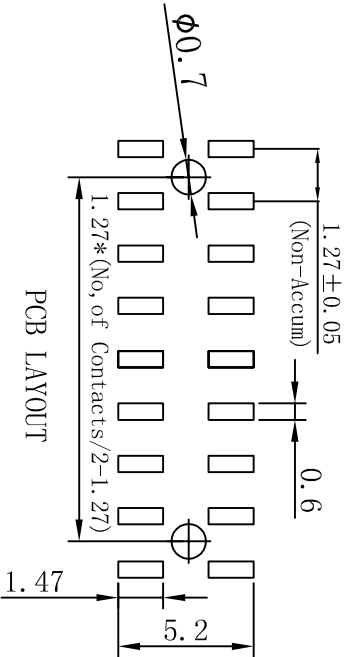

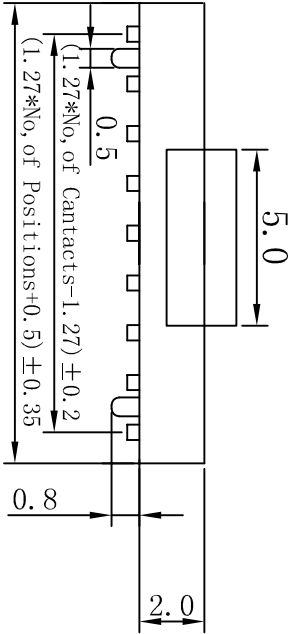


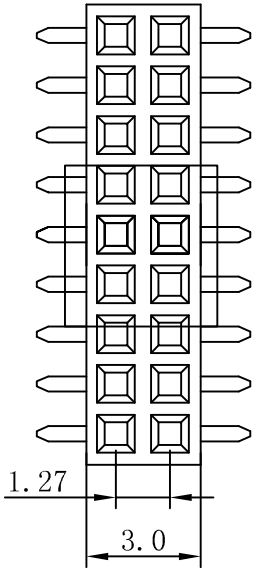

SPECIFICATIONS

Current Rating: 2Amps  
Insulator Resistance: 5000Mmegohms min.  
Dielectric Withstanding: AC 500v  
Operating Temperature: -40° ~ +105° c  
Max Processing Temp: 230° for 30 secnds  
Contact Material: Phorphos bronze  
Insulator Material: NY-6T  
Finish: Gold flash

UNSPECIFIED TOLERANCE: ±0.20

Dimen Sions List

| Contacts Per Row | A     | B     | Contacts Per Row | A     | B     |
|------------------|-------|-------|------------------|-------|-------|
| 2*02             | 2.54  | 1.27  | 2*22             | 27.94 | 26.67 |
| 2*03             | 3.81  | 2.54  | 2*23             | 29.21 | 27.94 |
| 2*04             | 5.08  | 3.81  | 2*24             | 30.48 | 29.21 |
| 2*05             | 6.75  | 5.08  | 2*25             | 31.75 | 30.48 |
| 2*06             | 7.62  | 6.35  | 2*26             | 33.02 | 31.75 |
| 2*07             | 8.89  | 7.62  | 2*27             | 34.29 | 33.02 |
| 2*08             | 10.16 | 8.89  | 2*28             | 35.56 | 34.29 |
| 2*09             | 11.43 | 10.16 | 2*29             | 36.83 | 35.56 |
| 2*10             | 12.70 | 11.43 | 2*30             | 38.70 | 36.83 |
| 2*11             | 13.97 | 12.70 | 2*31             | 39.37 | 38.10 |
| 2*12             | 15.24 | 13.97 | 2*32             | 40.64 | 39.37 |
| 2*13             | 16.51 | 15.24 | 2*33             | 41.91 | 40.64 |
| 2*14             | 17.78 | 16.51 | 2*34             | 43.18 | 41.91 |
| 2*15             | 19.05 | 17.78 | 2*35             | 44.45 | 43.18 |
| 2*16             | 20.32 | 19.05 | 2*36             | 45.72 | 44.45 |
| 2*17             | 21.59 | 20.32 | 2*37             | 46.99 | 45.72 |
| 2*18             | 22.86 | 21.59 | 2*38             | 46.99 | 54.61 |
| 2*19             | 24.13 | 22.66 | 2*39             | 49.53 | 48.26 |
| 2*20             | 25.40 | 24.13 | 2*40             | 50.80 | 49.53 |
| 2*21             | 26.67 | 25.40 |                  |       |       |

| APPROVALS      |             | DATE       | GEPU歌普                       |              |          |              |
|----------------|-------------|------------|------------------------------|--------------|----------|--------------|
| DRAWN          | ZHIWEI.CHEN | 2015.07.07 | TITLE: PH1.27*2.0 SMT 带内柱母   |              |          |              |
| CHECKED        |             |            | PART NO. GP25-1271WVS-2xNP-L |              |          |              |
| APPROVALS      |             |            | SCALE: 1:1 PROL              |              |          |              |
| TOLERANCES ARE |             | 30~0.15    | ±0.30                        | ANGLE        | UNIT: mm | SHEET 1 OF 1 |
| ECN NO.        |             | REV.       | DATE.                        | DESCRIPTION. |          |              |
|                |             | A          |                              | NEW          |          |              |
|                |             |            |                              | CHANGE.      |          |              |
|                |             |            |                              | CHECK.       |          |              |
|                |             |            |                              | APPRO.       |          |              |