
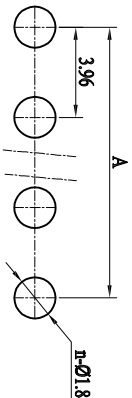
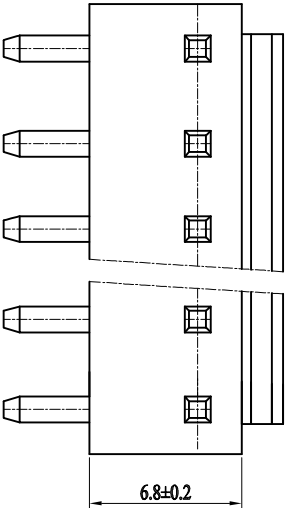
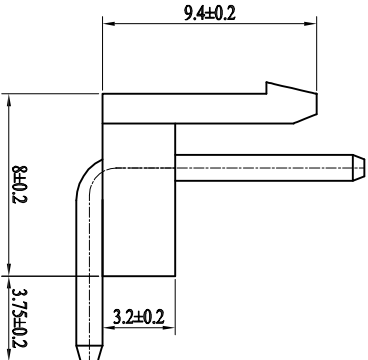


孔数	A	B
2	3.96	8.02
3	7.92	11.98
4	11.88	15.94
5	15.84	19.90
6	19.80	23.86
7	23.76	27.82
8	27.72	31.78
9	31.68	35.74
10	35.64	39.70
11	39.6	43.66
12	43.56	47.62

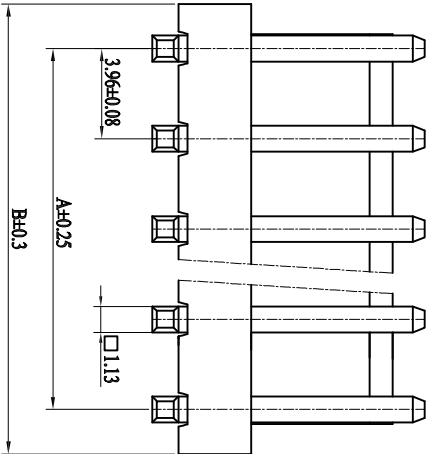

PCB 寸法
PCB LAYOUT

技术参数 (SPECIFICATIONS)

- 额定电压: 250V AC DC
- Voltage rating: 250V AC DC
- 额定电流: 7.0A AC DC MIN
- Current rating: 7.0A AC DC MIN
- 耐压值: 1000V AC/minute
- Withstand voltage: 1000V AC/minute
- 绝缘电阻: 1000MΩ MIN
- Insulation resistance: 1000MΩ MIN
- 接触电阻: 0.02Ω MAX
- Contact resistance: 0.02Ω MAX
- 工作温度: -25°C ~ +85°C
- Working Temperature: -25°C ~ +85°C
- 间距: 3.96 mm
- Pitch: 3.96 mm

材料 (MATERIAL)

- 外壳: 尼龙66
- Housing: PA66
- 插针: 黄铜
- Pin: Brass

APPROVALS		DATE	GEPU 歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07		
CHECKED			TITLE:	
APPROVALS				
TOLERANCES ARE			PART NO.	GP01-3961R-NP
30~0.1	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
10~30	±0.20		DRAWING NO.	
5~10	±0.15	±2°		
~ 5	±0.10			
ECN NO.	REV.	DATE.	DESCRIPTION.	
	A		NEW	