

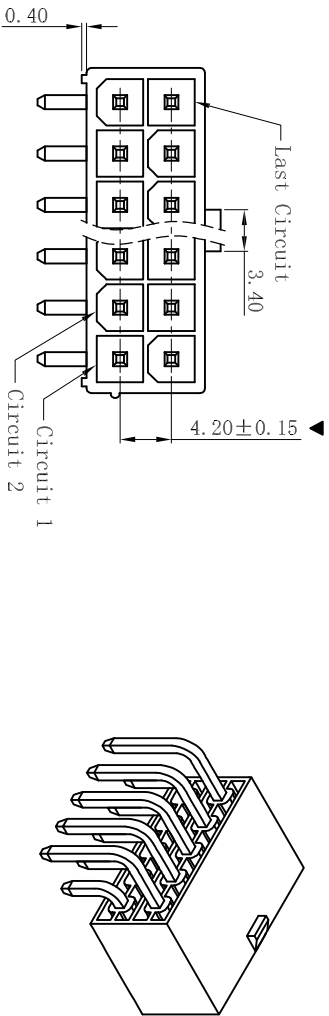
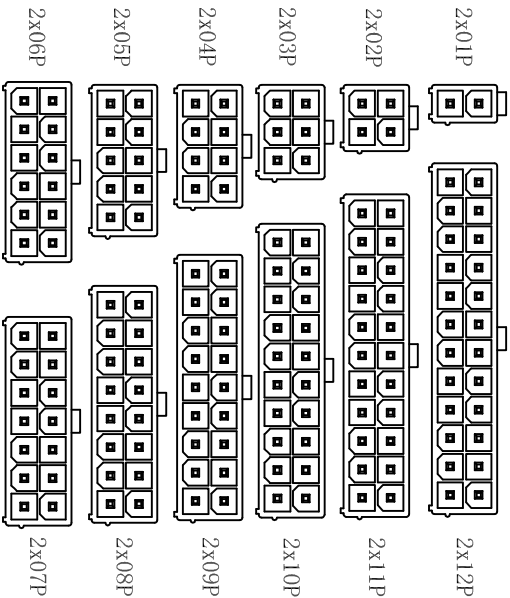


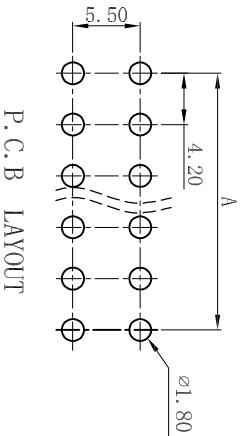

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance:100MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : 4255WR-2xNP
 - Poles : 02-24P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated or Gold-Flash

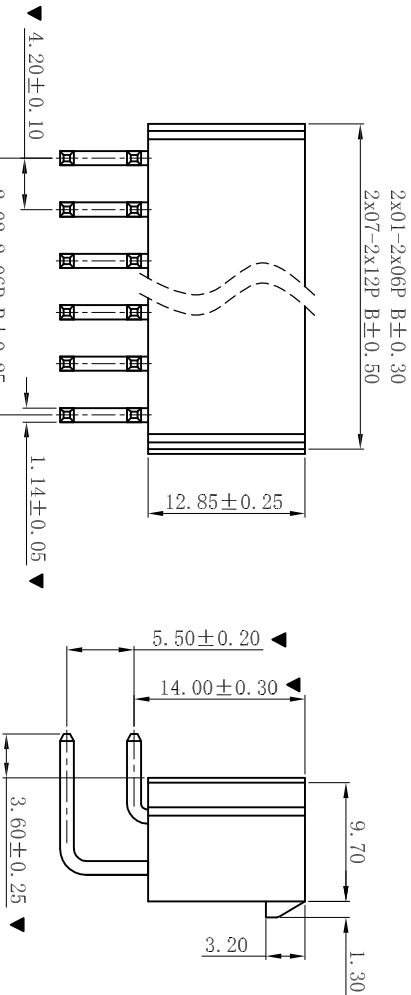

Poles	Dimensions (mm)	
	A	B
2x01	---	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07		
CHECKED			PART NO.	
APPROVALS				
TOLERANCES ARE		ANGLE	UNIT: mm	SCALE: 1:1
30~0.15		±0.30		PROJ
10~0.30		±0.20		
5~10		±0.15		
~5		±0.10		
±2°			DRAWING NO.	SHEET 1 OF 1

GEPU 歌普

GP01-4255WR-2xNP

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			