
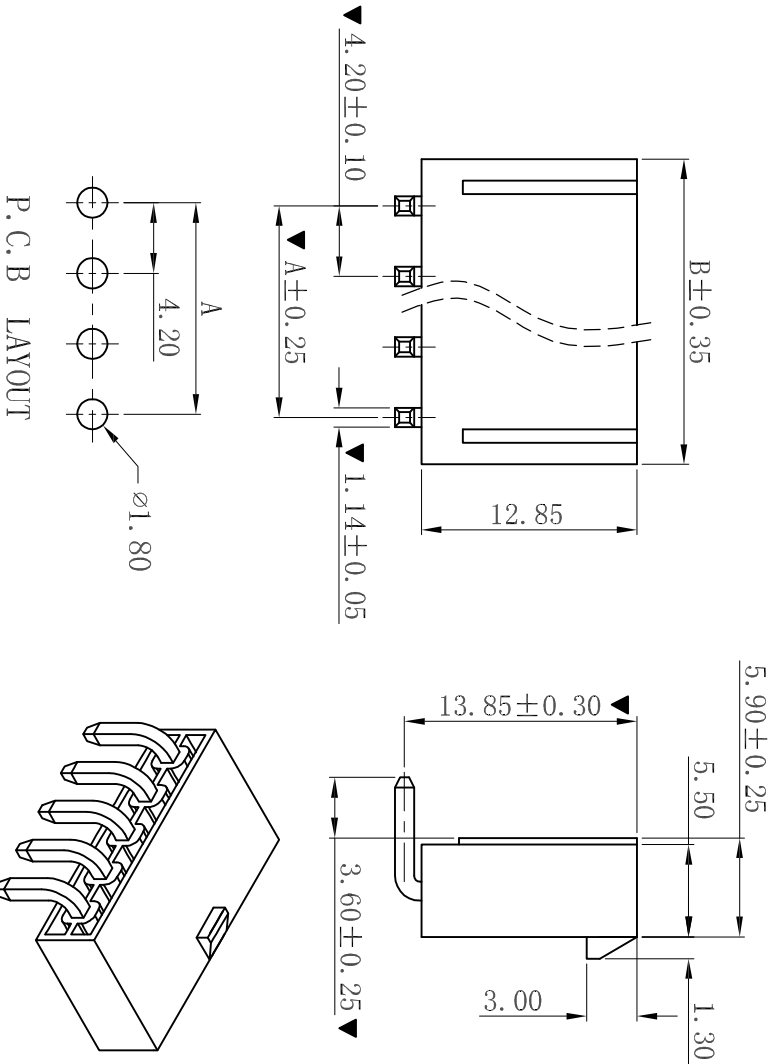


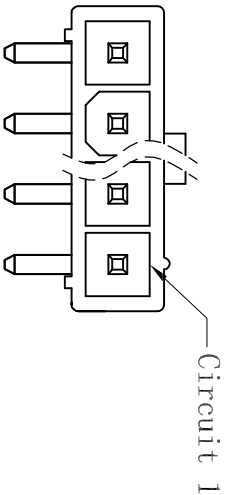


SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

WAFER

- Part No. : 4255WR-NP
- Poles : 02-06P
- Housing Material: PA66 UL94V-2 or UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated or Gold-Flash

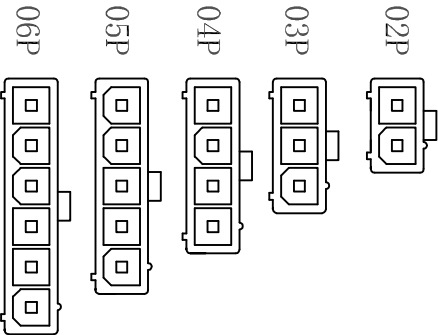

Poles	Dimensions (mm)	
	A	B
02	4.20	9.80
03	8.40	14.00
04	12.60	18.20
05	16.80	22.40
06	21.00	26.60

CIRCUIT SIZE LAYOUT

APPROVALS		DATE	GEPU 歌普		
DRAWN	ZHIWEI.CHEN	2015.07.07			
CHECKED			TITLE:		
APPROVALS			PART NO.	GP01-4255WR-NP	
TOLERANCES ARE			UNIT: mm	SCALE: 1:1	PROJ.
					SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			